

**NISO
NIS
NISF**

50Hz
End Suction Centrifugal Pump

Xrise New Energy Technology Co., Ltd
Add: Building 1, Industrial Park, South of Baogong
Avenue, Yaohai District, Hefei, Anhui, China
Email: helising@xrisolar.com
Contract: +86 17856275957
Call: +551 64676468
Fax: +551 64676468
Website: www.xrisolar.com



Pumping Water Pumping Honor



Company profile

Founded in 1991, Nanfang Zhongjin Environment Co.,Ltd. (hereinafter referred to as CNP) has been listed on the Shenzhen Stock Exchange on 9th December 2010; Stock name: CNP; Stock code: 300145.

As the first enterprise specializing in the research and large-scale production of stainless steel stamping welded centrifugal pump in China, CNP is currently the professional manufacturer with the highest volume of production and marketing in that industry. It ranks first in the country in terms of product scope, sales volume, and production quality. The company has set up a complete network of marketing services to meet the requirements of overseas markets as well as domestic needs. The products have seen a wide range of application in the area of pressurization, industry, living water, cycling of air-conditioning water, heat supply, fire extinguishing system, pumping of underground water, treatment of sewage and waste water, chemical industry and desalination of sea water etc.

CNP has now entered into the fast track of development and has taken a major step forward in forging China Strong Pump Enterprise and World's famous brand in the Pump Industry. In order to better meet the client's needs and requirements for expansion, it has set up a wide network of selling and service, as well as offices and service centers in major cities in China, which are aimed at providing timely and effective services for our clients. Meanwhile, our company has successfully penetrated into the world market by forging a good business relationship with more than 50 countries and regions in the Europe, Northern American, and Southeast Asia etc.



Contents

Model definition	1
Min. inlet pressure	2
Applications	3
Product structure	3
Features	3
Performance parameters	3
Curve conditions	3
Working conditions	4
Motor parameters	4
Pipeline Installation requirements	4
Spectral spectrum	5
Sectional drawing	7
Material list	7
NIS*G,NIS*(Q) Product range	9
NIS*G,NIS*(Q) Performance scope	12
2-Pole	
NIS100-65-200G/100-65-250G Performance curve	12
NIS100-65-315G/100-80-160G Performance curve	13
NIS125-100-200(Q)/125-100-200G Performance curve	14
NIS125-100-250G/125-100-315G Performance curve	15
4-Pole	
NIS100-65-200G/100-65-250G Performance curve	16
NIS100-65-315G/100-80-160G Performance curve	17
NIS125-100-200G/125-100-250G Performance curve	18
NIS125-100-315G/125-100-400G Performance curve	19
NIS150-125-200(Q)/150-125-200G Performance curve	20
NIS150-125-250G/150-125-315(Q) Performance curve	21
NIS150-125-315G/150-125-400(Q) Performance curve	22
NIS150-125-400G/200-150-250(Q) Performance curve	23
NIS200-150-250G/200-150-315G Performance curve	24
NIS200-150-400G Performance curve	25
NIS*G,NIS*(Q) Dimension drawing	26
NIS*G,NIS*(Q) Dimension table	26
NIS*G,NIS*(Q) Flange	28
NISO,NIS,NISF Product range	29
NISO,NIS,NISF Performance curve	34


Contents

2-Pole	
NISO,NIS,NISF50-32-160/50-32-200 Performance curve	34
NISO,NIS,NISF65-40-200/65-40-250 Performance curve	35
NISO,NIS,NISF65-40-315/65-50-160 Performance curve	36
NISO,NIS,NISF80-50-200/80-50-250 Performance curve	37
NISO,NIS,NISF80-50-315/80-65-160 Performance curve	38
NISO,NIS,NISF100-65-200/100-65-250 Performance curve	39
NISO,NIS,NISF100-65-315/100-80-160 Performance curve	40
NISO,NIS,NISF125-100-200/125-100-250 Performance curve	41
NISO,NIS,NISF125-100-315 Performance curve	42
4-Pole	
NISO,NIS,NISF50-32-160 Performance curve	42
NISO,NIS,NISF50-32-200/65-40-200 Performance curve	43
NISO,NIS,NISF65-40-250/65-40-315 Performance curve	44
NISO,NIS,NISF65-50-160/80-50-200 Performance curve	45
NISO,NIS,NISF80-50-250/80-50-315 Performance curve	46
NISO,NIS,NISF80-65-160/100-65-200 Performance curve	47
NISO,NIS,NISF100-65-250/100-65-315 Performance curve	48
NISO,NIS,NISF100-80-160/125-100-200 Performance curve	49
NISO,NIS,NISF125-100-250/125-100-315 Performance curve	50
NISO,NIS,NISF125-80-400/125-100-400 Performance curve	51
NISO,NIS,NISF150-125-250/150-125-315 Performance curve	52
NISO,NIS,NISF150-125-400/200-150-315 Performance curve	53
NISO,NIS,NISF200-150-400/250-200-315 Performance curve	54
NISO,NIS,NISF250-200-400/300-250-315(Q) Performance curve	55
NISO,NIS,NISF300-250-400(Q)/300-250-315 Performance curve	56
NISO,NIS,NISF300-250-400 Performance curve	57
NISO Dimension drawing	58
NISO Dimension table	59
NISO Performance curve	61
NISO Dimension table	61
NIS,NISF Product range	67
NIS,NISF Performance curve	67

Model definition

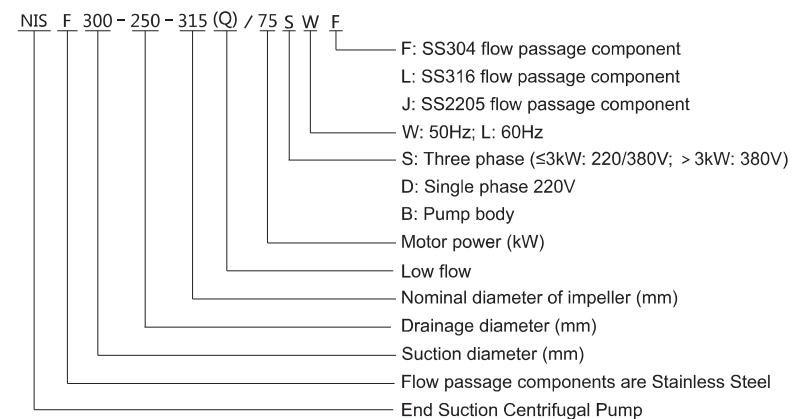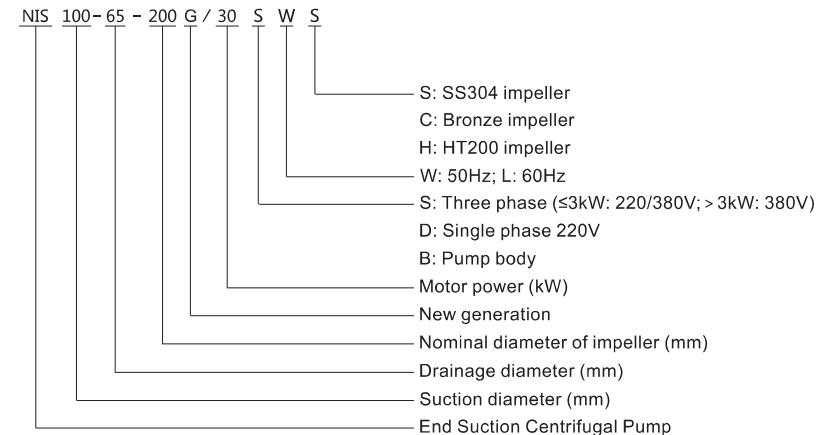

Model definition

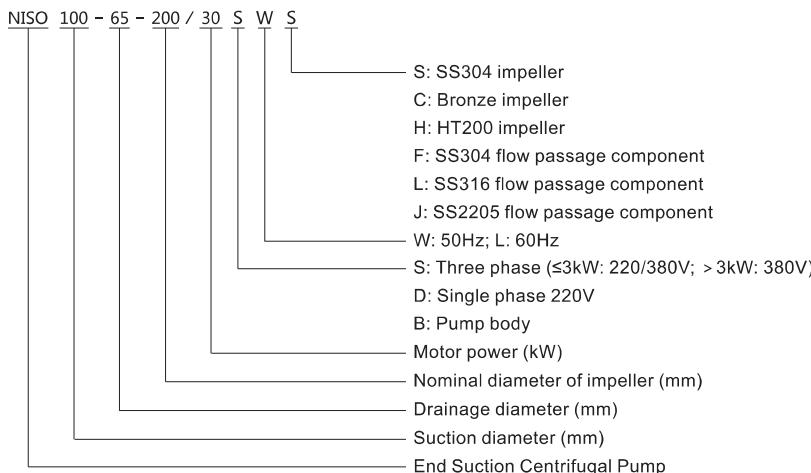

Minimum inlet pressure NPSH

In case that the pressure in pump is lower than the steam pressure used to convey liquid, the cavitations will occur. To avoid cavitations, a minimum pressure at the inlet side of the pump shall be guaranteed. The maximum suction can be calculated with the following formula:

$$H = Pb \times 10.2 - NPSH - H_f - Hv - H_s$$

H—Maximum suction head(m)

Pb—Atmosphere pressure(bar)

In a closed system, Pb means system pressure(bar)

NPSH—Net positive suction head(m)

It can be read from the point of Max. flow rate shown on NPSH curve.

Hf—Pipeline loss at the inlet(m)

It is in accordance with the pipeline possible Max. flow.

Hv—Steam pressure(m)

It depends on liquid temperature and steam pressure value.


Hs—Safety margin(m)

Minimum 0.5m delivery head.

If the calculated result H is negative, the pump may run under the Max. suction head H. In case the calculated result H is negative, a delivery head of Min. inlet pressure is necessary.

NOTE: Normally, the above calculation will not be done.

- H is calculated in the following conditions:
 1. The liquid temperature is comparatively higher;
 2. Liquid flow exceeds rated value;
 3. Suction head is comparatively large or inlet pipeline long;
 4. System pressure is too low;
 5. Bad inlet condition.

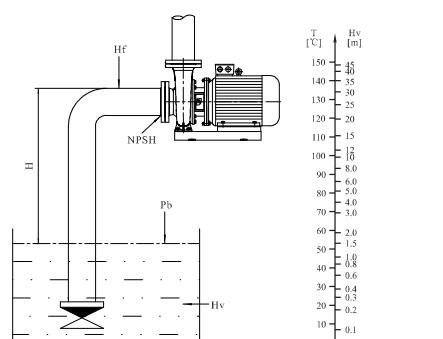

Applications

- Clean, thin, non-corrosive, non-flammable or non-explosive liquid without grain or fiber.
- Water supply system
- HVAC system
- Booster and constant water supply system
- Fire-fighting and splitting system
- Irrigation and farming
- Industrial cooling and heat circulation system
- Industrial transferring and drainage system

Product structure

- Non-self-priming, single stage, single suction, horizontal axial suction and radial discharge, pump body is fixed by base.
- Standard wear-resistant mechanical seal.
- TEFC motor, size complies to IEC standard.
- NISO pump use bearing cradle, which can orientate bearing, prevent from radical vibration, improve the rigidity of rotary part.
- NISO pump integral pump shaft, use deep groove grease lubricated bearing.
- NISO pump use semi-flexible coupling to connect pump and motor.
- NISO pump dimension conforms to ISO2858 standard.

- NIS,NISF series pump are coupled with extension shaft structure.
- Inlet and outlet flange and pump body of cast iron pump conform to standard of PN16 in GB/T17241.6 (ISO7005-2); Inlet and outlet flange and pump body of Stainless Steel pump conform to standard of PN16 in GB/T9113 (ISO7005-1).

Performance parameters

- Max. Flow: 1200 m³/h
- Max. Head: 160 m
- Max. Working pressure: 16 bar
- Max. Inlet pressure: 6 bar
- Max. Power: 200kW
- Liquid temperature: -15°C~ 110°C
- Inlet and outlet diameter:

Inlet diameter: DN50~DN300

Oulet diameter: DN32~DN250

Features

- Adopt Pull-back structure, avoid dismantling pump body and pipeline when repairing.
- All NISO pump only use 4 types of pump shafts and bearing cover, making many parts exchangeable.
- Designs of NIS,NISO,NISF series impellers are optimized, inlet is enlarged, no whirlpool, deduct water pump NPSH efficiently, which makes pump work stable with little noise. Performance curve is flat, flow range is wide, performance is similar with international pump industry peers.

- NIS*G,NIS*(Q) series pump are designed according to newest standard in GB/T5662, whose performance curve are steeper than NIS,NISO,NISF series. Flow range conforms to requirements, use excellent hydraulic model and CFD optimization, high efficiency, reasonable head spread, compact structure, easy maintenance.

- NIS,NISF pumps are small, compact and easy to install.

- Main spare parts like impeller, pump body, pump head of NIS*G,NIS*(Q) series pump are cast iron. But can be customized according to customers' requirement.

Curve conditions

- Following conditions are suitable for the performance curves shown above.

- All curves are based on the measured values of motor 3×380V, 50Hz: under the constant speed of 2900 rpm, 1450rpm or 1480rpm; 60Hz: under the constant speed of 3500rpm, 1750rpm.

- Curve tolerance in conformity with ISO9906:2012, Grade 3B.

- Measurement is done with 20°C air-free water, without impurities.

- The operation of pump shall refer to the performance region indicated by the thickened curve to prevent overheating due to too small flow rate or overload of motor due to too large flow rate.

- If the thickness and density of the pumped liquid is different from water, the motor power should be adjusted.

Working conditions

Relative humidity of pump

- The pump is specifically designed for installation in non-corrosive and non-explosive environments with a relative humidity of no more than 95%.

Ambient humidity and altitude

- Ambient humidity and installation altitude are important factors influencing motor service life as they also affect the life of bearings and insulation systems.

- The installation altitude is the height at which the installation location is above sea level. If the ambient temperature exceeds the recommended maximum value, or if the installation height exceeds the recommended maximum altitude, air cooling effect may be poor due to low density and the motor shall not be operated at full capacity. In this case, choose a motor with a higher output power.

Motor parameter

Standard motor


- TEFC motor, size complies to GB/28575 standard.
- Standard configuration: 2-pole motor and 4-pole motor.

Pipeline Installation requirements

- Pump casing must not be subjected to pipe pressure when installing the pipe.


- The suction and drain pipes must be sized appropriately and the inlet pressure of the pump needs to be considered.

- Install the pipe to avoid air blockage, especially on the inlet side of the pump. See picture below.


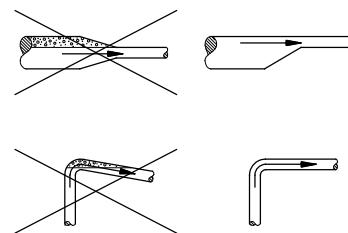


- Install an isolation valve on each end of the pump so that the system does not have to be drained when cleaning or repairing the pump.



- Ensure that the pipe is sufficiently supported (inlet and outlet side) as close as possible to the pump. The butt flange should be attached to pump flange without being subjected to tensile stresses, as the presence of tensile stress can damage the pump.

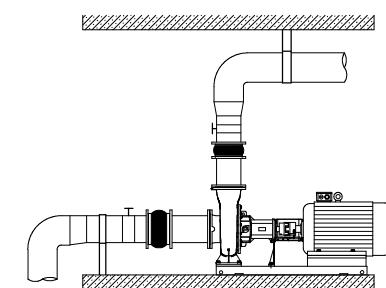


NIS*G,NIS*(Q) Spectral spectrum

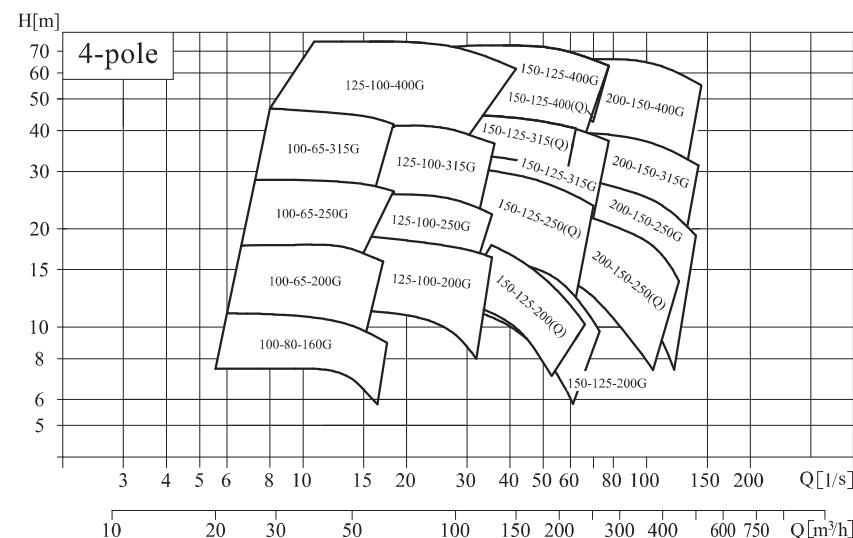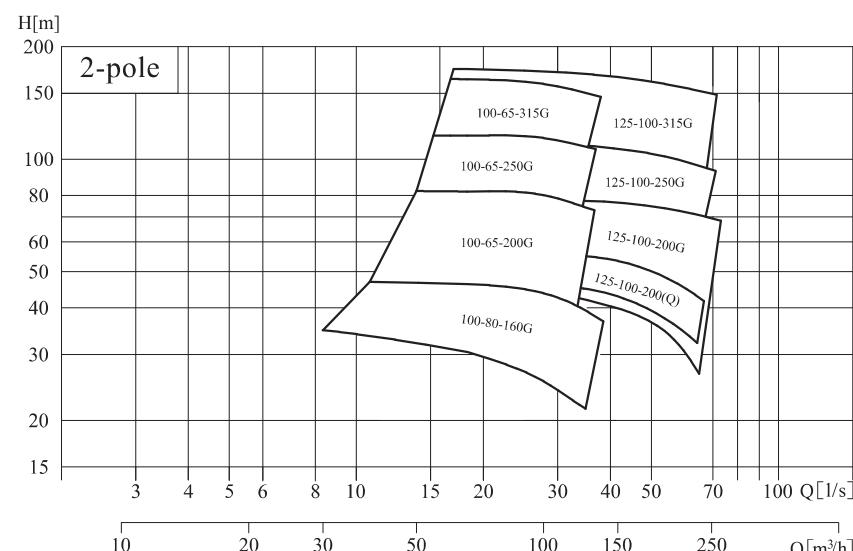

NISO,NIS,NISF Spectral spectrum

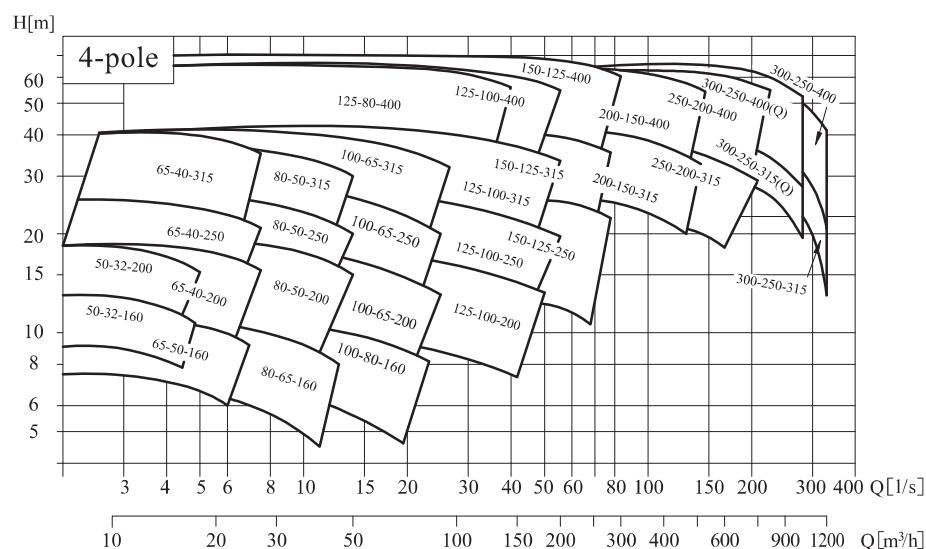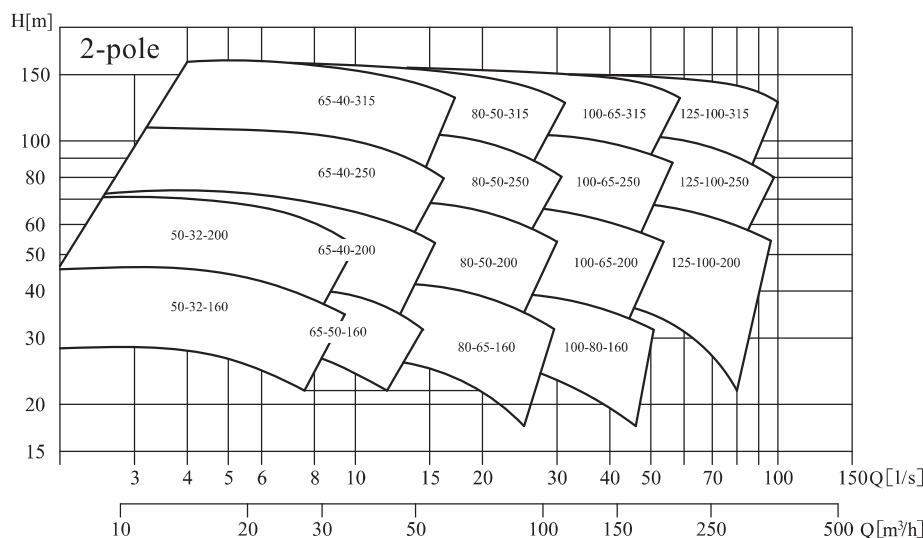

NIS,NISF Sectional drawing

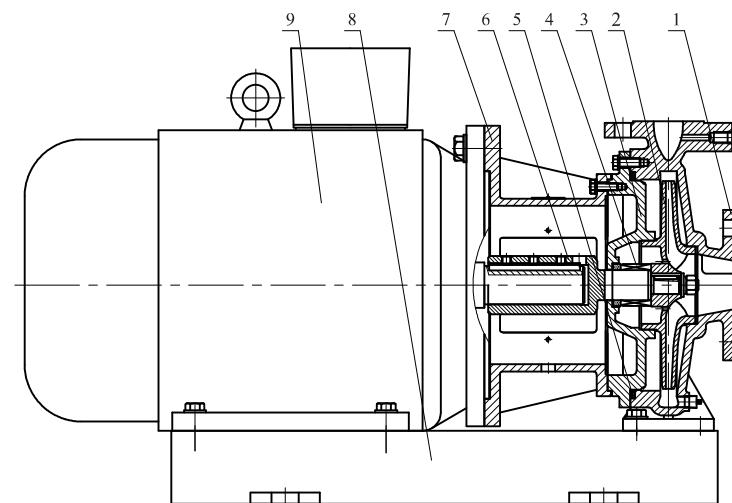


Material list of NIS,NISF

No.	Parts	Material	Code/AISI/ASTM
1	Pump body	QT500-7/ZG07Cr19Ni9	ASTM80-55/AISI304
2	Impeller	HT200/ZG07Cr19Ni9	ASTM25B/AISI304
3	Pump cover	HT200/ZG07Cr19Ni9	ASTM25B/AISI304
4	Mechanical seal	Carbon/Silicon Carbide	
5	O-ring	NBR	
6	Shaft	20Cr13/06Cr19Ni10	AISI420/AISI304
7	Pump head	HT200	ASTM25B
8	Base	Q235-A	AISIA570
9	Motor		

Note: Standard material of flow passage components of NIS*G,NIS*(Q) are cast iron, Stainless Steel need to be specially ordered.

NISO Sectional drawing

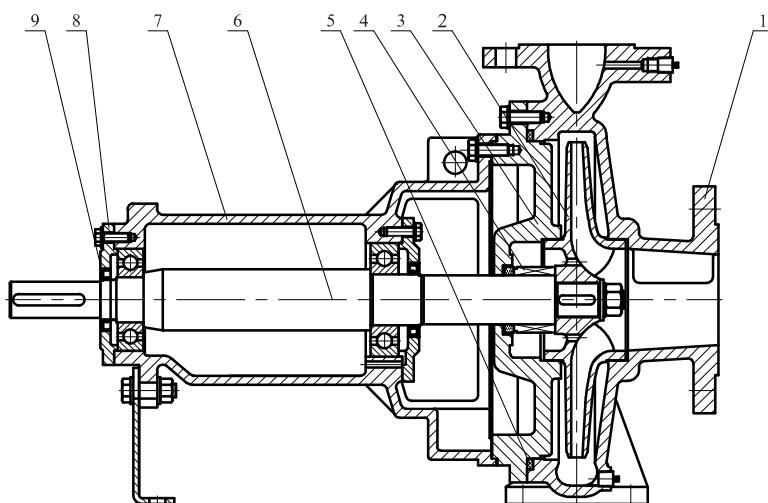

Material list of NISO

No.	Parts	Material	Code/AISI/ASTM
1	Pump body	QT500-7/ZG07Cr19Ni9	ASTM80-55/AISI304
2	Impeller	HT200/ZG07Cr19Ni9	ASTM25B/AISI304
3	Pump cover	HT200/ZG07Cr19Ni9	ASTM25B/AISI304
4	Mechanical seal	Carbon/Silicon Carbide	
5	O-ring	NBR	
6	Shaft	20Cr13/06Cr19Ni10	AISI420/AISI304
7	Bearing housing	HT200	ASTM25B
8	Bearing cover	HT200	ASTM25B
9	Oil seal	NBR	

NIS*G,NIS*(Q) Product range

No.	Model	Q [m³/h]	H [m]	Flow range [r/min]	Motor [kW]	n [r/min]	2-pole
1	NIS100-65-200G/18.5	100	42	40~120	18.5		
2	NIS100-65-200G/22		51		22		
3	NIS100-65-200G/30		67		30		
4	NIS100-65-200G/37		80		37		
5	NIS100-65-250G/45		103		45		
6	NIS100-65-250G/55		116		55		
7	NIS100-65-315G/75		140		75		
8	NIS100-65-315G/90		160		90		
9	NIS100-80-160G/11		26		11		
10	NIS100-80-160G/15		36		15		
11	NIS100-80-160G/18.5		44		18.5		
12	NIS125-100-200(Q)/30	160	43	60~200	30		
13	NIS125-100-200(Q)/37		52		37		
14	NIS125-100-200G/30		35		30		
15	NIS125-100-200G/37		45		37		
16	NIS125-100-200G/45		54		45		
17	NIS125-100-200G/55		68		55		
18	NIS125-100-200G/75		74		75		
19	NIS125-100-250G/75		86		75		
20	NIS125-100-250G/90		102		90		
21	NIS125-100-315G/110		128		110		
22	NIS125-100-315G/132		150		132		
23	NIS125-100-315G/160		160		160		

NIS*G,NIS*(Q) Product range



No.	Model	Q [m ³ /h]	H [m]	Flow range [r/min]	Motor [kW]	n [r/min]	4-pole						
1	NIS100-65-200G/3	50	13	20~60	3	1450							
2	NIS100-65-200G/4												
3	NIS100-65-250G/5.5												
4	NIS100-65-250G/7.5												
5	NIS100-65-315G/11												
6	NIS100-65-315G/15		40		4								
7	NIS100-80-160G/1.5												
8	NIS100-80-160G/2.2												
9	NIS125-100-200G/4	100	9.5										
10	NIS125-100-200G/5.5												
11	NIS125-100-200G/7.5												
12	NIS125-100-250G/11		18										
13	NIS125-100-315G/15												
14	NIS125-100-315G/18.5		25		4								
15	NIS125-100-400G/30												
16	NIS125-100-400G/37												
17	NIS125-100-400G/45		33										
18	NIS150-125-200(Q)/5.5	160	8.5	60~200	5.5	1450							
19	NIS150-125-200(Q)/7.5												
20	NIS150-125-200(Q)/11												
21	NIS(F)50-125-200G/5.5	200	12		5.5								
22	NIS(F)50-125-200G/7.5												
23	NIS(F)50-125-200G/11												
24	NIS150-125-250G/15		16		7.5								
25	NIS150-125-250G/18.5												
26	NIS150-125-250G/22												

NIS*G,NIS*(Q) Product range

No.	Model	Q [m ³ /h]	H [m]	Flow range [r/min]	Motor [kW]	n [r/min]	4-pole			
27	NIS150-125-315(Q)/22	160	32	60~200	22	1480				
28	NIS150-125-315(Q)/30									
29	NIS150-125-315G/30		36		30					
30	NIS150-125-315G/37									
31	NIS150-125-400(Q)/37		50		37					
32	NIS150-125-400G/45		54		45					
33	NIS150-125-400G/55									
34	NIS150-125-400G/75									
35	NIS200-150-250(Q)/11	300	9.5	120~360	11	1480				
36	NIS200-150-250(Q)/15									
37	NIS200-150-250(Q)/18.5		12.5		15					
38	NIS200-150-250(Q)/22									
39	NIS(F)200-150-250G/15		16		18.5					
40	NIS(F)200-150-250G/18.5									
41	NIS(F)200-150-250G/22		20		22					
42	NIS(F)200-150-250G/30									
43	NIS200-150-315G/37	400	24	160~480	37	1480				
44	NIS200-150-315G/45									
45	NIS200-150-315G/55		29		45					
46	NIS200-150-400G/75									
47	NIS200-150-400G/90		36		55					
48	NIS200-150-400G/110									



Performance curve

NIS100-65-200G/100-65-250G

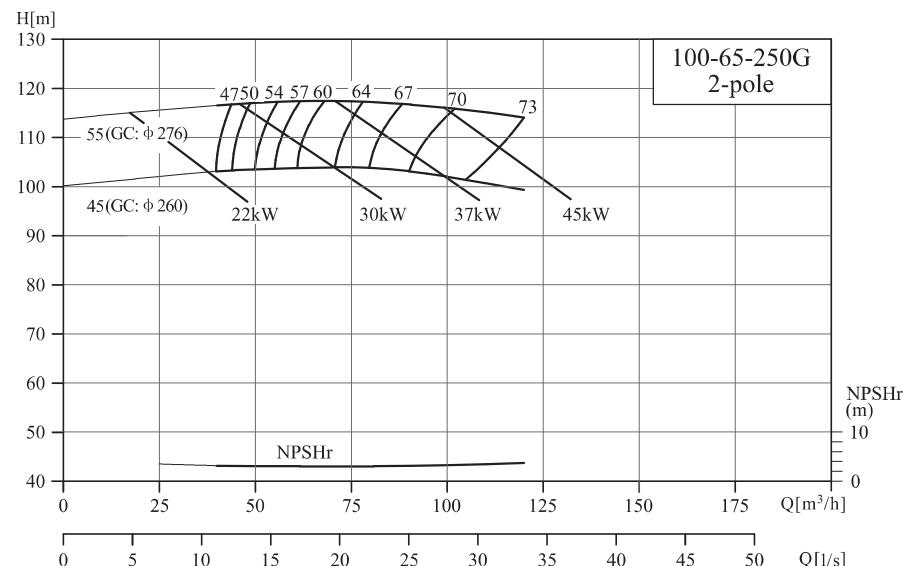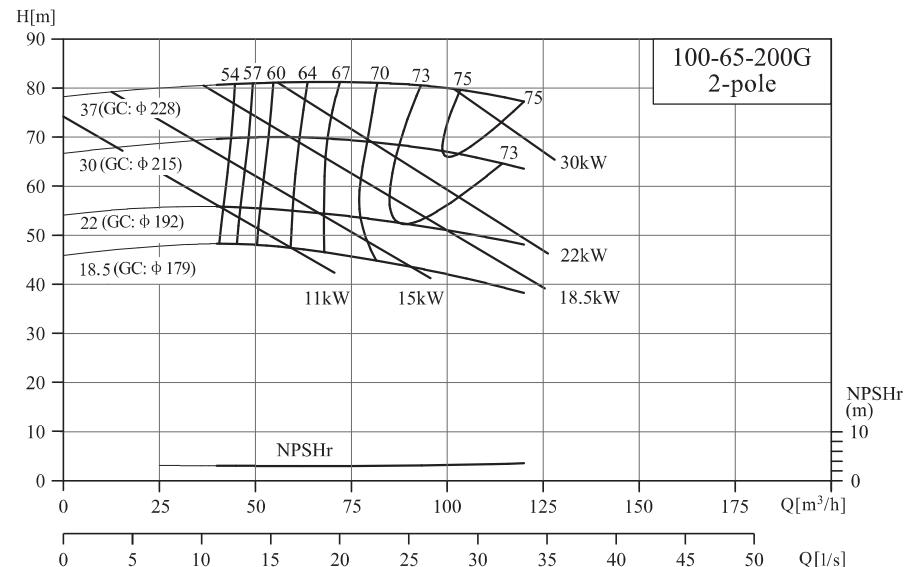


Performance curve

NIS100-65-315G/100-80-160G

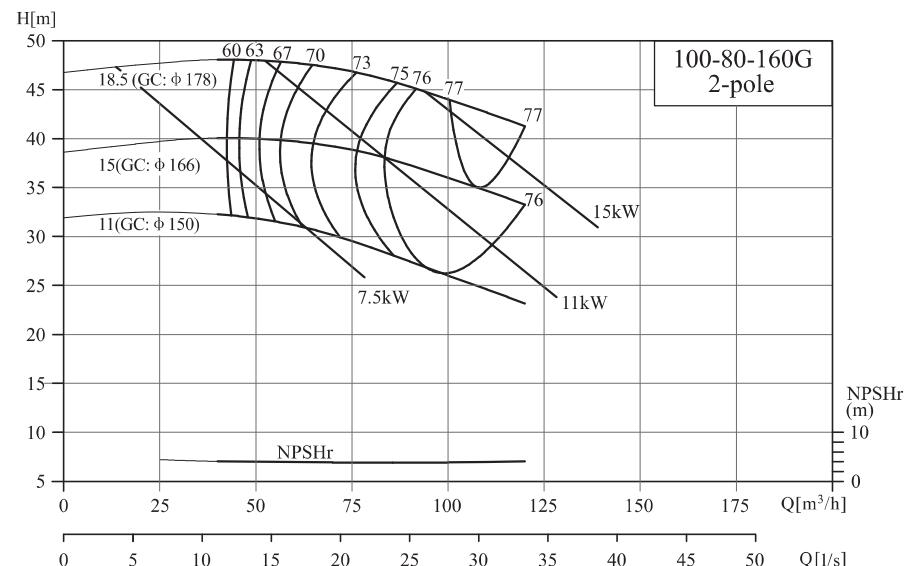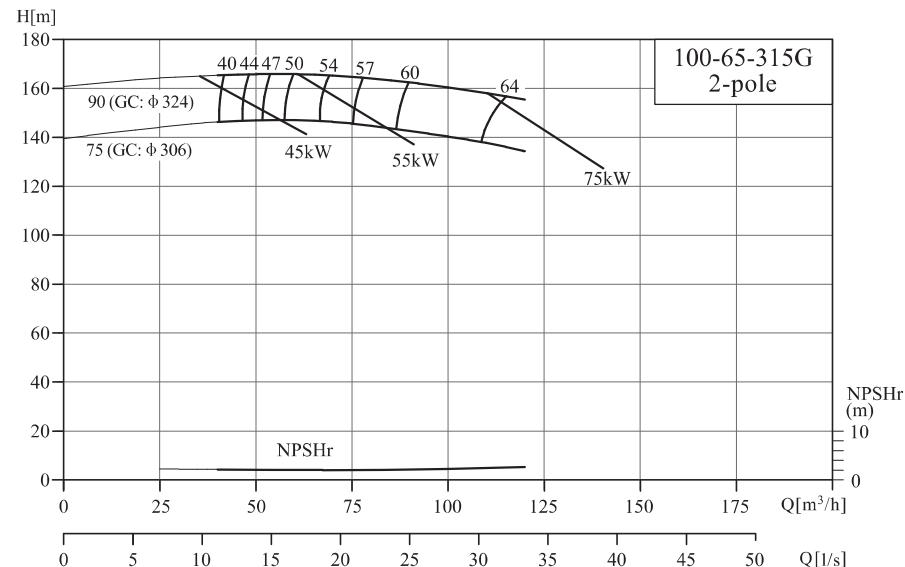




Performance curve

NIS125-100-200(Q)/125-100-200G

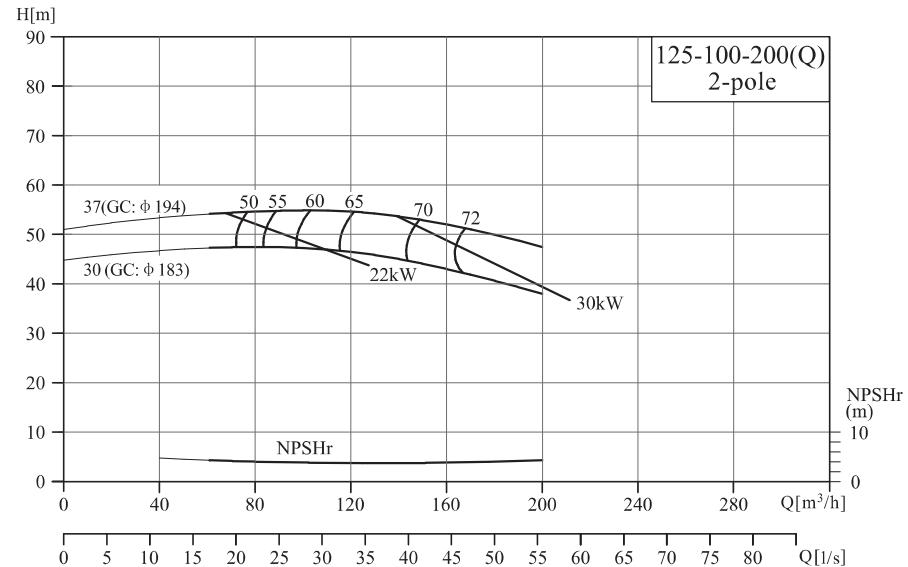



Performance curve

NIS125-100-250G/125-100-315G

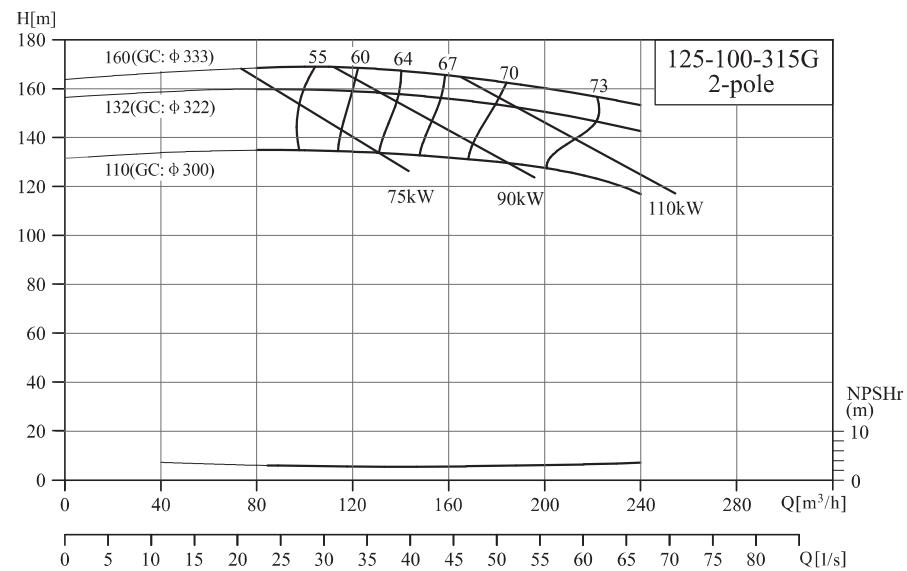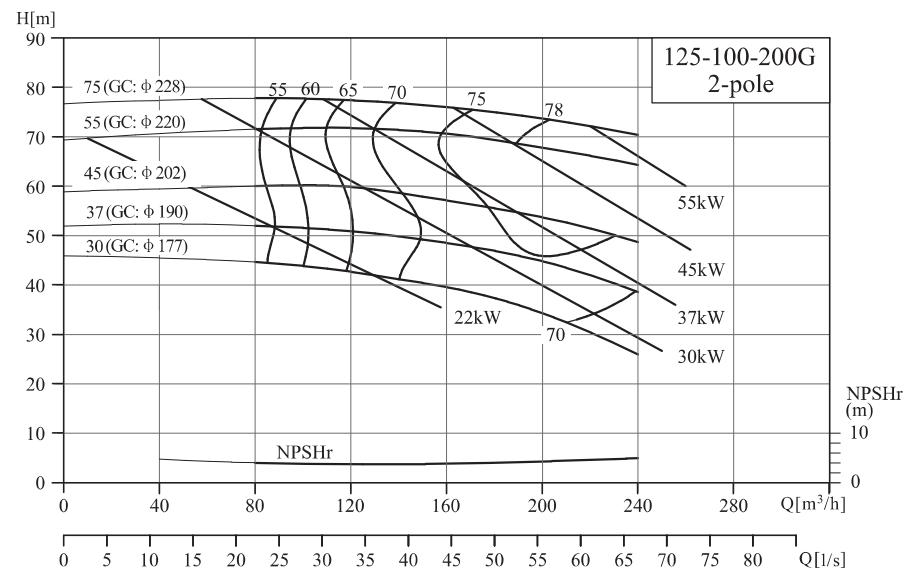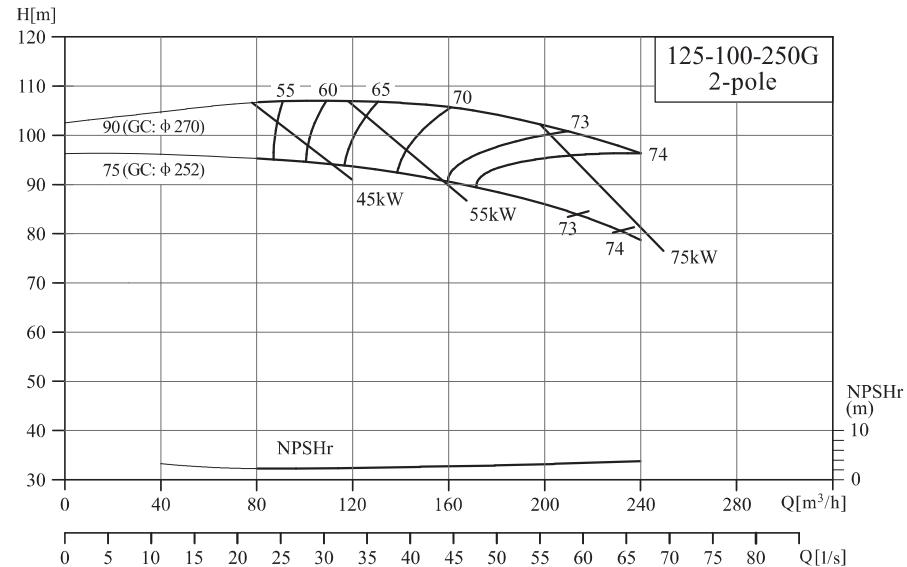



Performance curve

NIS100-65-200G/100-65-250G

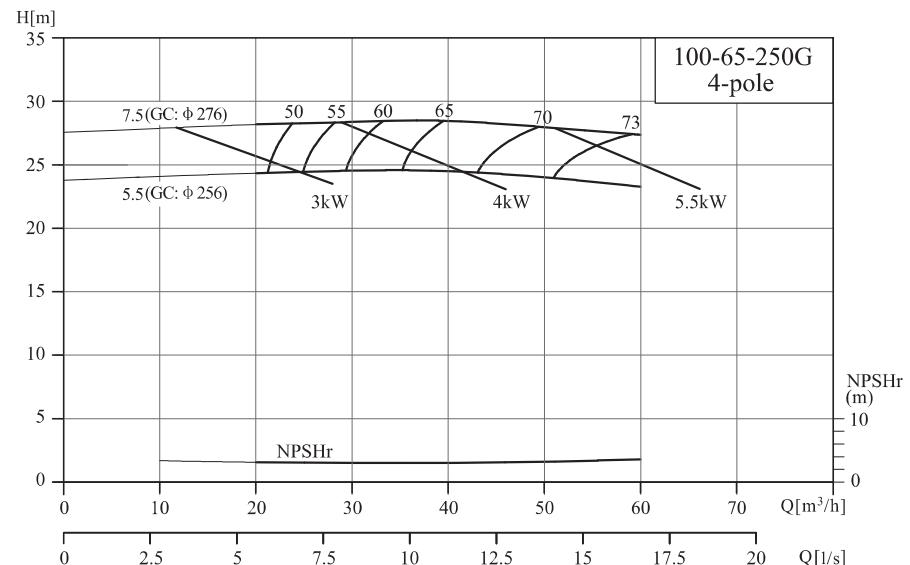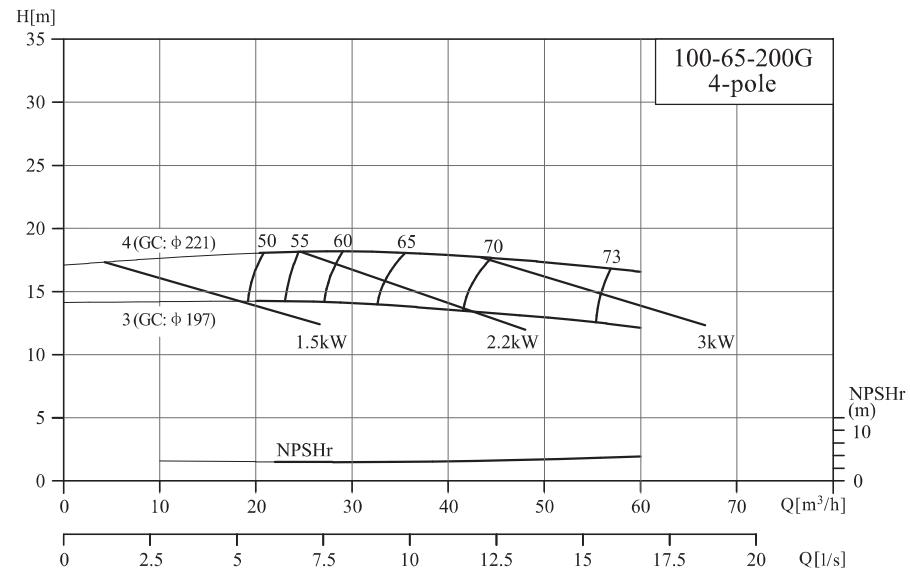


Performance curve

NIS100-65-315G/100-80-160G

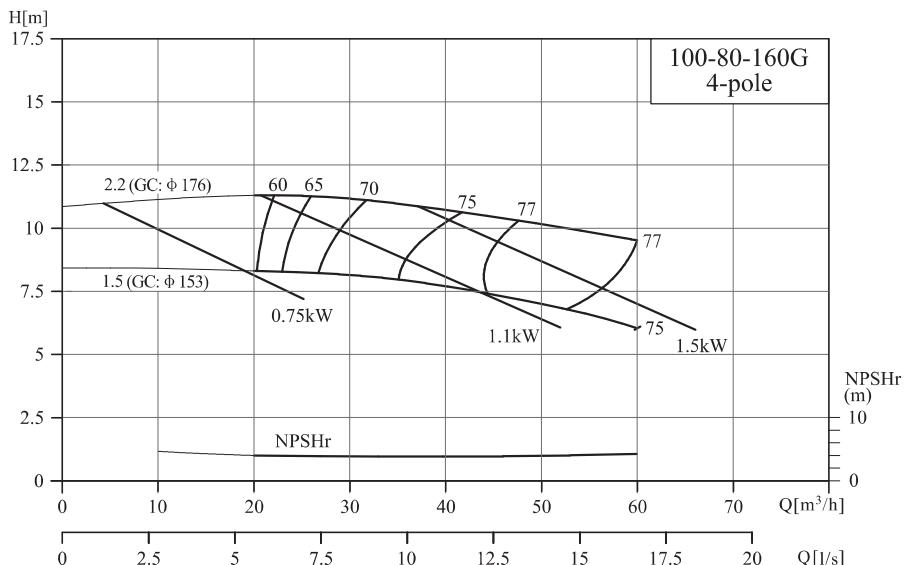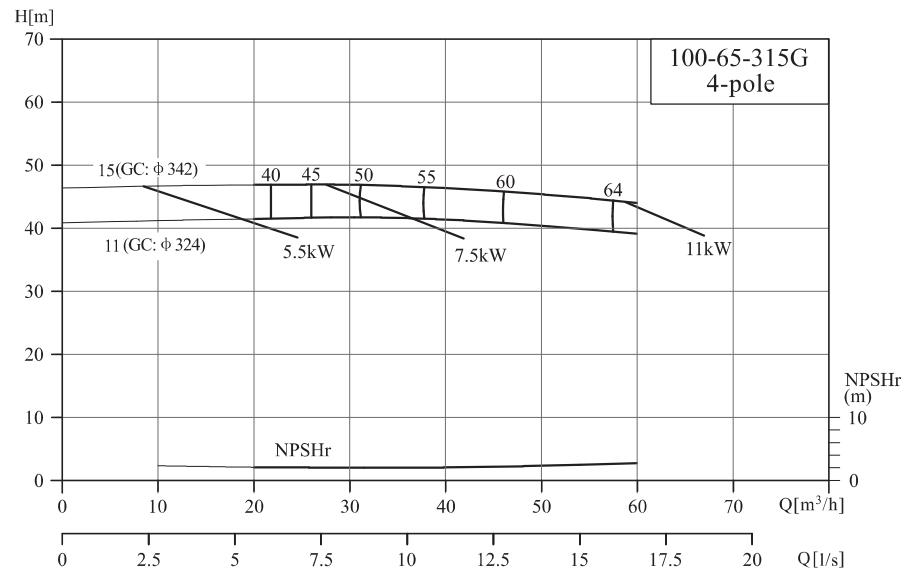




Performance curve

NIS125-100-200G/125-100-250G

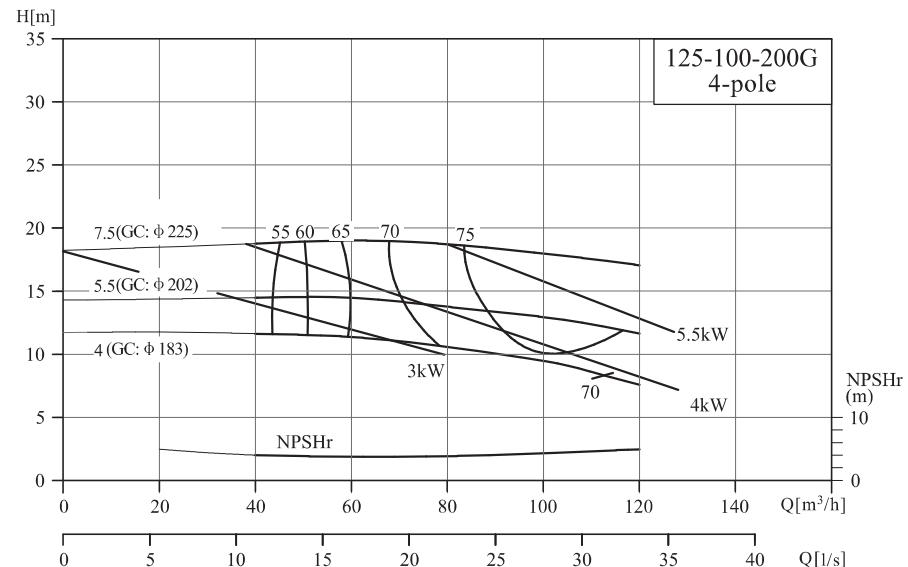



Performance curve

NIS125-100-315G/125-100-400G

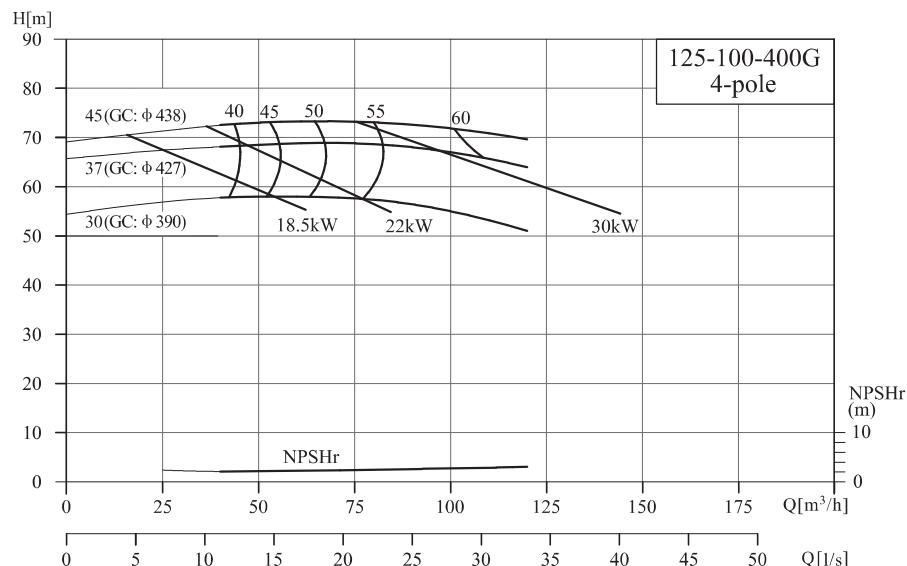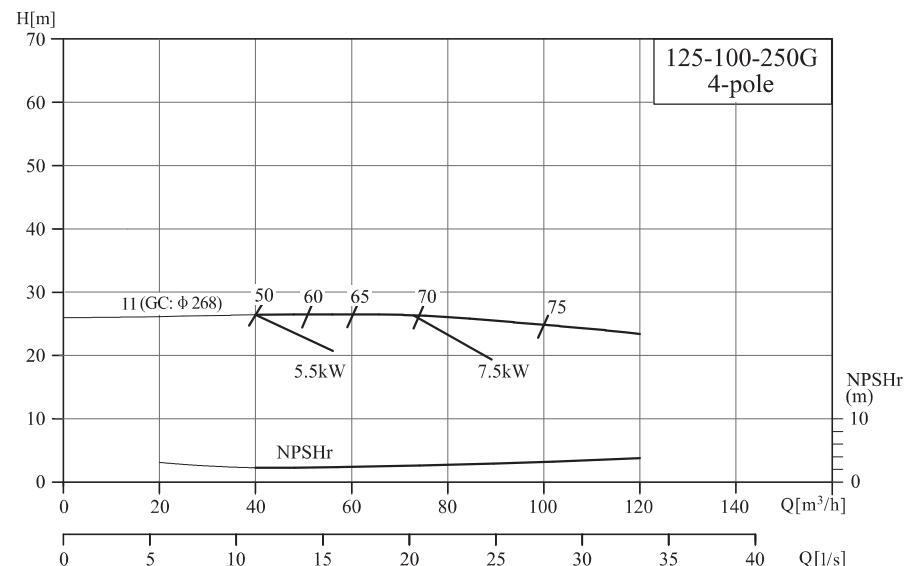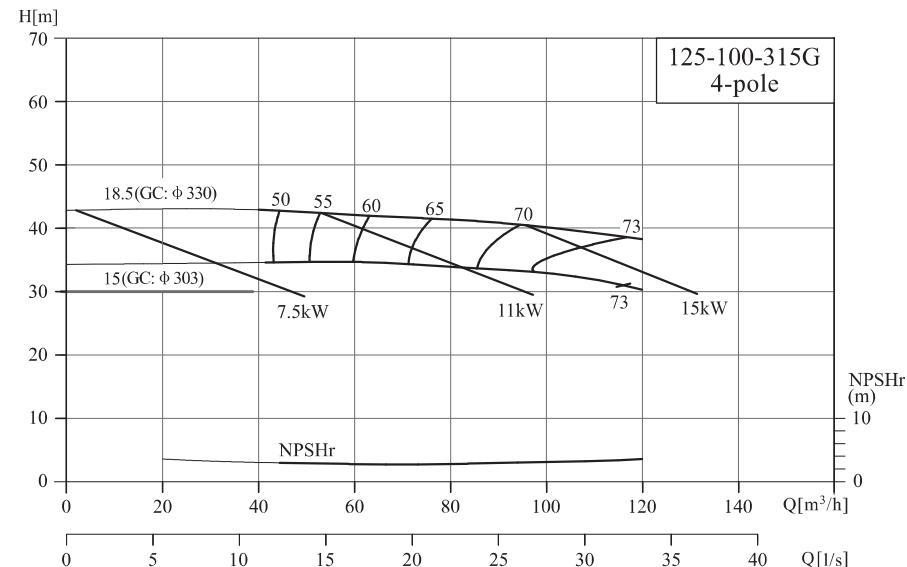



Performance curve

NIS150-125-200(Q)/150-125-200G

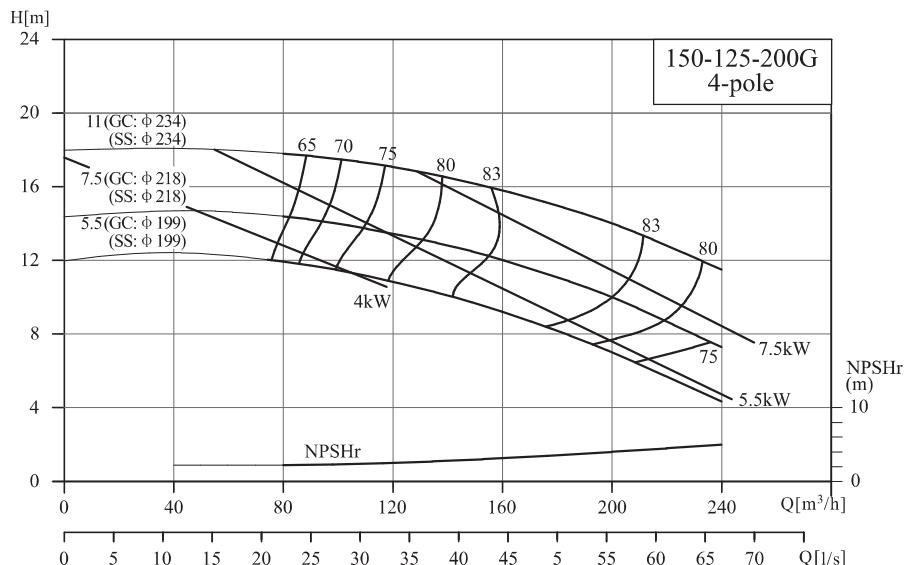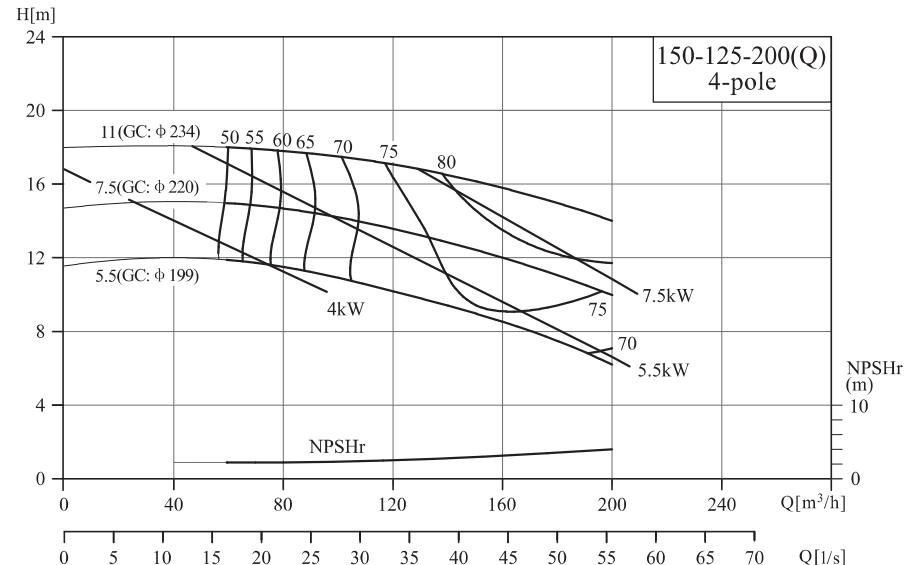



Performance curve

NIS150-125-250G/150-125-315(Q)

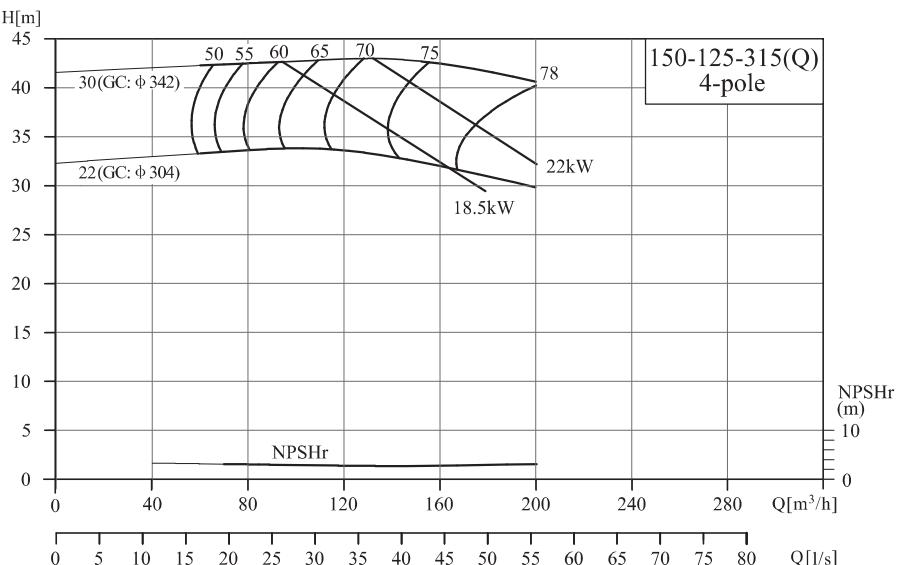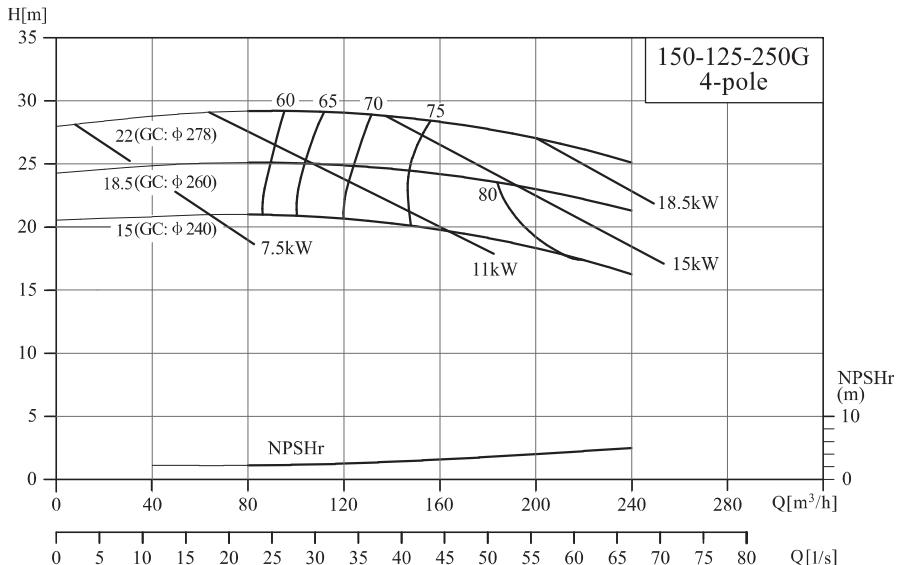



Performance curve

NIS150-125-315G/150-125-400(Q)

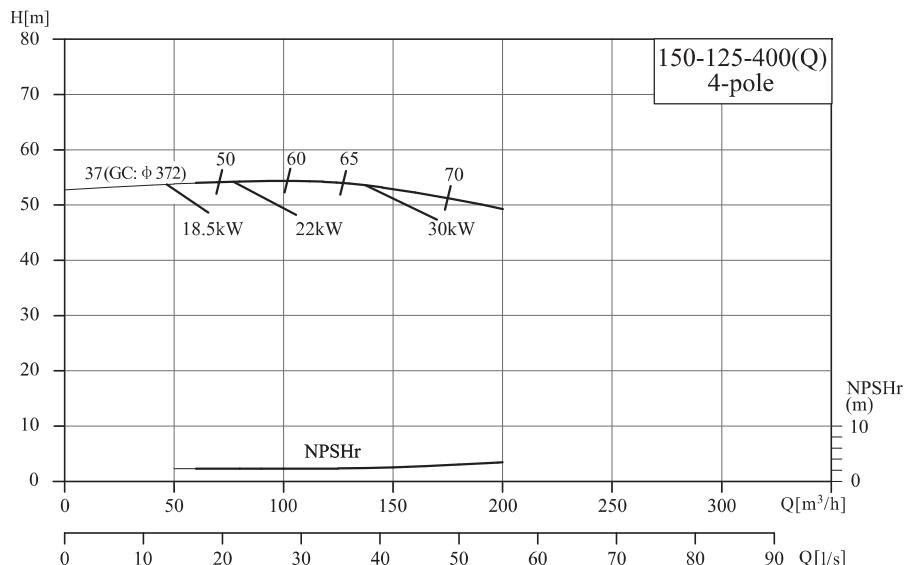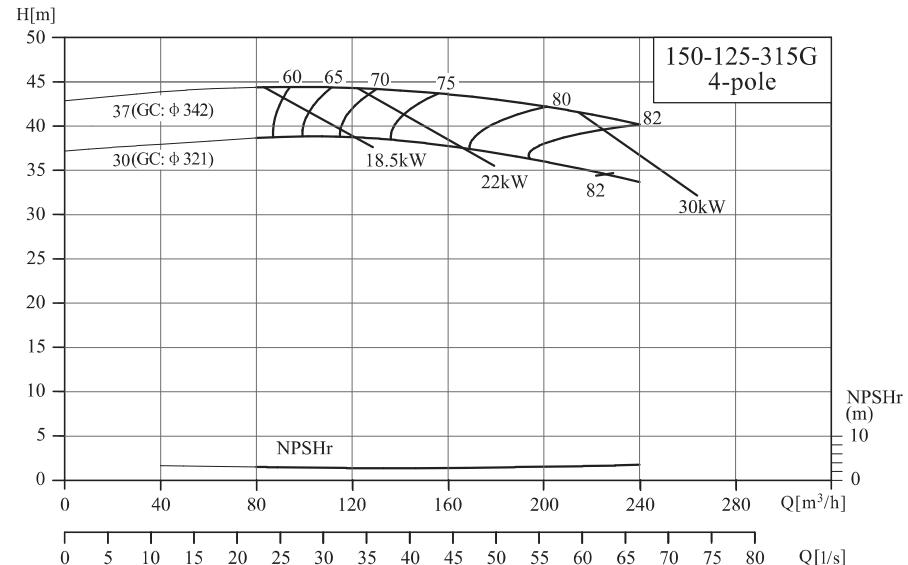


Performance curve

NIS150-125-400G/200-150-250(Q)

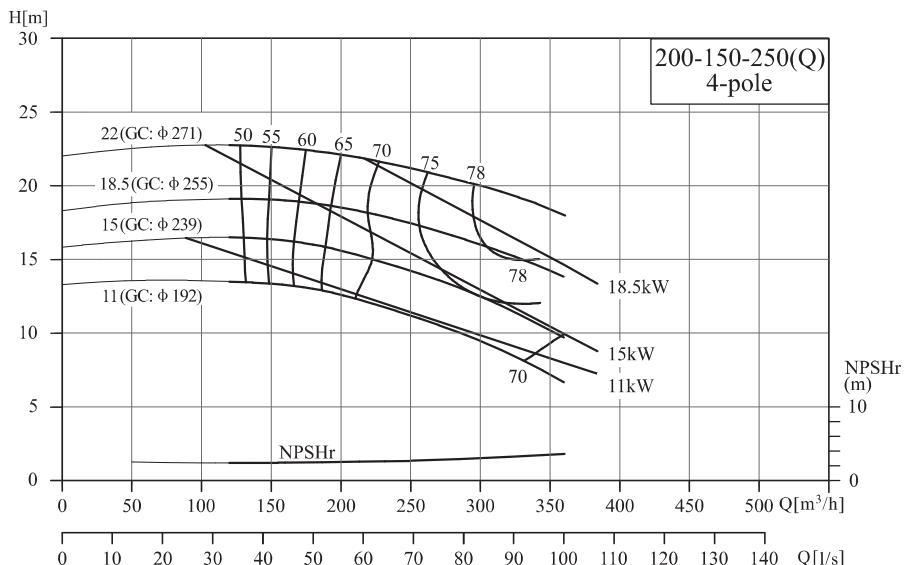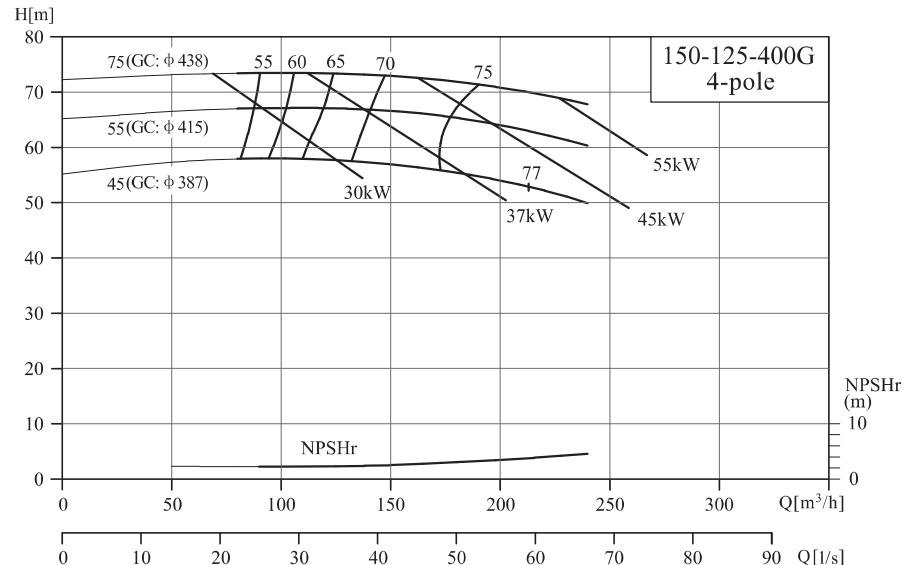



Performance curve

NIS200-150-250G/200-150-315G

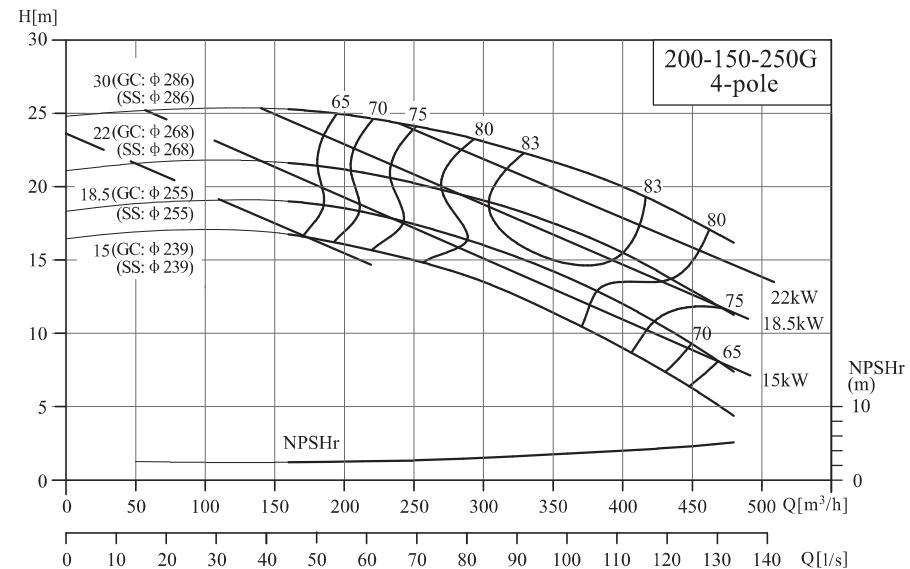


Performance curve

NIS200-150-400G

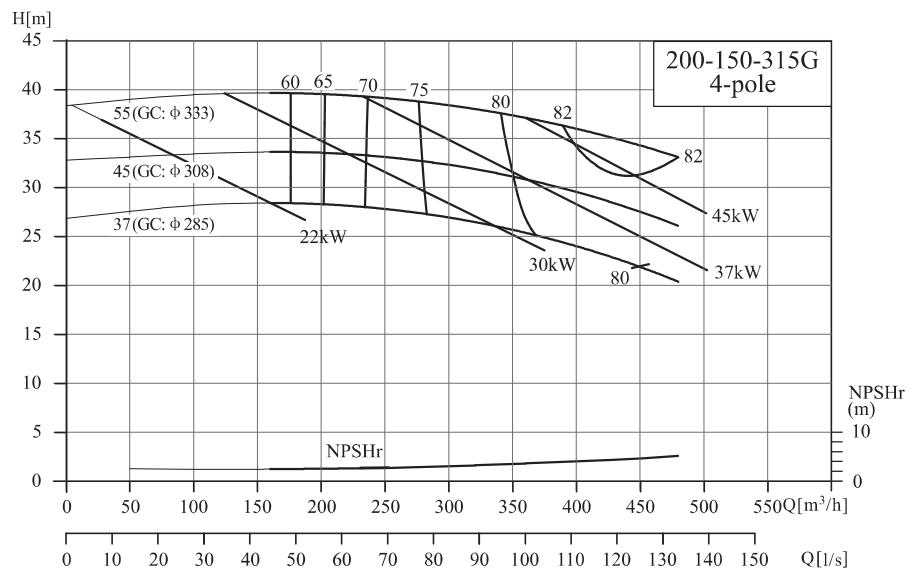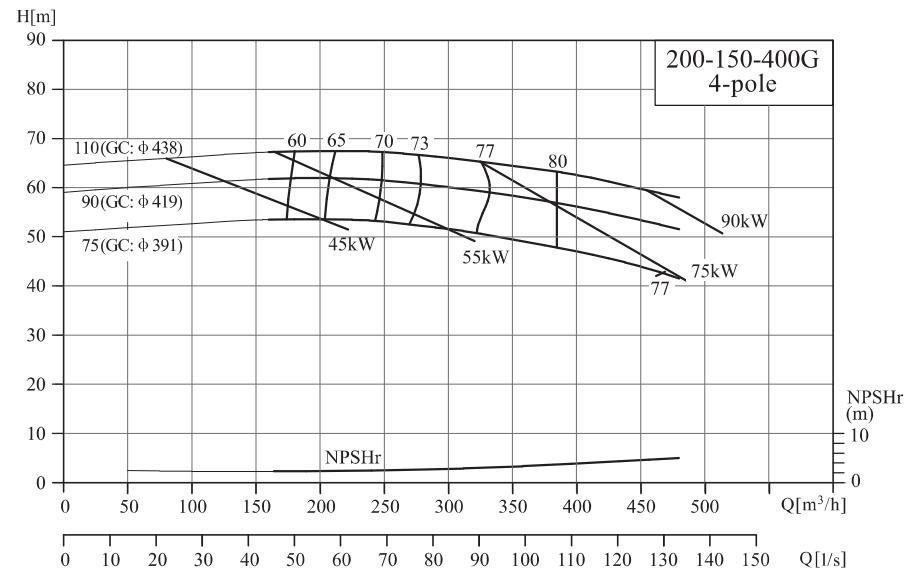

NIS*G,NIS*(Q) Dimension drawing

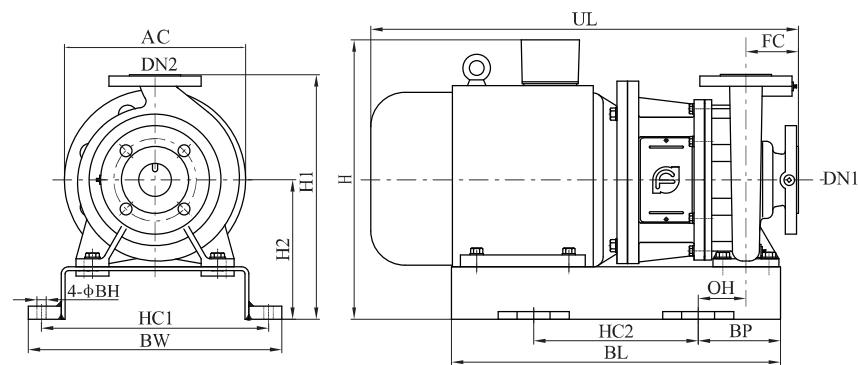

NIS*G,NIS*(Q) Dimension table

2-pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
125-100-250G	75	780	660	380	630	600	670	1000	200	22	114	1265	140	125	100	701
	90	780	660	380	630	600	670	1100	250	22	164	1315	140	125	100	738
	110	945	730	415	720	600	760	1100	250	22	164	1545	140	125	100	1170
125-100-315G	132	945	730	415	720	700	760	1220	260	22	174	1655	140	125	100	1230
	160	945	730	415	720	700	760	1220	260	22	174	1655	140	125	100	1350

4-pole


Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
100-65-200G	3	430	485	260	386	300	416	500	100	14	35	591	100	100	65	109
	4	448	485	260	386	300	416	500	100	14	35	606	100	100	65	114
100-65-250G	5.5	493	530	280	430	350	460	550	100	14	20	687	125	100	65	147
	7.5	493	530	280	430	350	460	550	100	18	20	727	125	100	65	166
100-65-315G	11	565	585	305	470	400	500	700	150	18	70	854	125	100	65	249
	15	565	585	305	470	400	500	700	150	18	70	909	125	100	65	270
100-80-160G	1.5	400	440	240	350	250	380	410	105	14	40	536	100	100	80	76
	2.2	410	440	240	350	300	380	500	100	14	35	591	100	100	80	87
125-100-200G	4	468	560	280	430	300	460	500	100	14	20	631	125	125	100	136
	5.5	493	560	280	430	350	460	550	100	18	20	687	125	125	100	152
125-100-250G	7.5	493	560	280	430	350	460	550	100	18	20	727	125	125	100	171
	11	565	585	305	470	400	500	700	150	18	70	924	140	125	100	258
125-100-315G	15	590	645	330	470	400	500	700	150	18	69	869	140	125	100	281
	18.5	605	645	330	470	450	500	750	150	18	69	954	140	125	100	317
125-100-400G	30	665	715	360	580	500	620	800	150	22	50	1028	140	125	100	444
	37	715	735	380	585	550	625	950	200	22	100	1071	140	125	100	523
150-125-200(Q)	45	715	735	380	585	550	625	950	200	22	100	1101	140	125	100	552
	5.5	543	630	330	470	350	500	570	100	18	20	721	140	150	125	168
150-125-200(Q)	7.5	543	630	330	470	350	500	570	100	18	20	761	140	150	125	180
	11	590	630	330	470	400	500	700	150	18	69	869	140	150	125	235
150-125-200G	5.5	543	630	330	470	350	500	570	100	18	20	721	140	150	125	168
	7.5	543	630	330	470	350	500	570	100	18	20	761	140	150	125	180
150-125-250G	11	590	630	330	470	400	500	700	150	18	69	869	140	150	125	235
	15	590	685	330	470	400	500	700	150	18	69	924	140	150	125	284
150-125-250G	18.5	605	685	330	470	450	500	750	150	18	69	954	140	150	125	315
	22	605	685	330	470	450	500	750	150	18	69	994	140	150	125	333

NIS*G,NIS*(Q) Dimension table

4-pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
150-125-315(Q)	22	635	715	360	580	500	620	800	150	22	50	994	140	150	125	400
	30	665	715	360	580	500	620	800	150	22	50	1028	140	150	125	430
150-125-315G	30	665	715	360	580	500	620	800	150	22	50	1028	140	150	125	430
	37	715	735	380	585	550	625	950	200	22	100	1071	140	150	125	507
150-125-400(Q)	37	750	815	415	585	550	625	950	200	22	100	1071	140	150	125	521
	45	750	815	415	585	550	625	950	200	22	100	1103	140	150	125	561
150-125-400G	55	780	815	415	585	550	625	950	200	22	100	1187	140	150	125	620
	75	815	815	415	630	600	670	1000	200	22	100	1262	140	150	125	776
200-150-250(Q)	11	620	735	360	580	500	620	800	150	22	50	901	160	200	150	273
	15	620	735	360	580	500	620	800	150	22	50	956	160	200	150	299
	18.5	635	735	360	580	500	620	800	150	22	50	988	160	200	150	337
	22	635	735	360	580	500	620	800	150	22	50	1026	160	200	150	360
200-150-250G	15	620	735	360	580	500	620	800	150	22	50	956	160	200	150	299
	18.5	635	735	360	580	500	620	800	150	22	50	988	160	200	150	337
	22	635	735	360	580	500	620	800	150	22	50	1026	160	200	150	360
	30	665	735	360	580	500	620	800	150	22	50	1048	160	200	150	426
200-150-315G	37	750	815	415	605	500	670	900	200	22	100	1116	160	200	150	541
	45	750	815	415	605	500	645	900	200	22	100	1146	160	200	150	579
	55	780	815	415	605	600	645	1000	200	22	100	1254	160	200	150	650
200-150-400G	75	815	865	415	630	600	675	1100	250	22	150	1329	160	200	150	859
	90	815	865	415	630	600	675	1100	250	22	150	1379	160	200	150	956
	110	945	865	415	720	700	760	1220	260	22	160	1614	160	200	150	1325

NIS*G,NIS*(Q) Flange

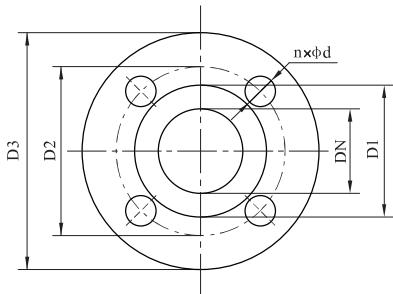

NIS*G,NIS*(Q) Flange dimension

DN	D1	D2	D3	n	d
65	122	145	185	4	18
80	133	160	200	8	18
100	158	180	220	8	18
125	184	210	250	8	18
150	212	240	285	8	22
200	268	295	340	12	22

NISO, NIS, NISF Product range

2-pole

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]
1	50-32-160/3	12.5	28	3	2900
2	50-32-160/4		36	4	
3	50-32-160/5.5		44	5.5	
4	50-32-200/7.5		55	7.5	
5	50-32-200/11		74	11	
6	65-40-200/7.5		48	7.5	
7	65-40-200/11	25	62	11	2950
8	65-40-200/15		72	15	
9	65-40-250/18.5		84	18.5	
10	65-40-250/22		95	22	
11	65-40-250/30		105	30	
12	65-40-315/22		105	22	
13	65-40-315/30		120	30	
14	65-40-315/37		145	37	
15	65-40-315/45		165	45	
16	65-50-160/4		28	4	2900
17	65-50-160/5.5		36	5.5	
18	65-50-160/7.5		42	7.5	
19	80-50-200/11	50	44	11	2950
20	80-50-200/15		57	15	
21	80-50-200/18.5		64	18.5	
22	80-50-200/22		71	22	
23	80-50-250/30		84	30	
24	80-50-250/37		100	37	
25	80-50-315/37		105	37	
26	80-50-315/45		125	45	
27	80-50-315/55		140	55	
28	80-50-315/75		152	75	

NISO, NIS, NISF Product range

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]	2-pole
29	80-65-160/5.5	50	22	5.5	2900	
30	80-65-160/7.5		29	7.5		
31	80-65-160/11		38	11		
32	80-65-160/15		44	15		
33	100-65-200/18.5	100	36	18.5	2950	
34	100-65-200/22		43	22		
35	100-65-200/30		56	30		
36	100-65-200/37		67	37		
37	100-65-250/45		80	45		
38	100-65-250/55		88	55		
39	100-65-250/75		108	75		
40	100-65-315/90		128	90		
41	100-65-315/110		148	110		
42	100-80-160/11		23	11		
43	100-80-160/15		30	15		
44	100-80-160/18.5		35	18.5		
45	100-80-160/22		40	22		
46	125-100-200/30	200	34	30	2950	
47	125-100-200/37		41	37		
48	125-100-200/45		48	45		
49	125-100-200/55		55	55		
50	125-100-200/75		66	75		
51	125-100-250/75		75	75		
52	125-100-250/90		86	90		
53	125-100-250/110		100	110		
54	125-100-315/90		93	90		
55	125-100-315/110		108	110		
56	125-100-315/132		124	132		
57	125-100-315/160		144	160		

NISO, NIS, NISF Product range

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]	4-pole
1	50-32-160/0.55	6.3	8.5	0.55	1450	
2	50-32-160/0.75		11	0.75		
3	50-32-200/1.1		14	1.1		
4	50-32-200/1.5		18	1.5		
5	65-40-200/1.1	12.5	12	1.1	25	
6	65-40-200/1.5		15	1.5		
7	65-40-200/2.2		17.5	2.2		
8	65-40-250/3		25	3		
9	65-40-315/4		34	4		
10	65-40-315/5.5		40	5.5		
11	65-50-160/0.55		7	0.55		
12	65-50-160/0.75		9	0.75		
13	65-50-160/1.1		10.5	1.1		
14	80-50-200/1.5		11	1.5		
15	80-50-200/2.2		15	2.2		
16	80-50-200/3		17.5	3		
17	80-50-250/4		21	4		
18	80-50-250/5.5	50	25	5.5	1480	
19	80-50-315/5.5		30	5.5		
20	80-50-315/7.5		37	7.5		
21	80-65-160/0.75		6	0.75		
22	80-65-160/1.1		8	1.1		
23	80-65-160/1.5		10.5	1.5		
24	100-65-200/3		11.5	3		
25	100-65-200/4		14	4		
26	100-65-200/5.5		16	5.5		
27	100-65-250/5.5		20	5.5		
28	100-65-250/7.5		25	7.5		
29	100-65-315/11		32	11		

NISO, NIS, NISF Product range



No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]	4-pole
30	100-65-315/15	50	40	15	1480	
31	100-80-160/1.5		6.5	1.5		
32	100-80-160/2.2		9	2.2	1450	
33	100-80-160/3		10.5	3		
34	125-80-400/15		39	15		
35	125-80-400/18.5		45	18.5		
36	125-80-400/22		50	22	1480	
37	125-80-400/30		60	30		
38	125-80-400/37		67	37		
39	125-100-200/4		9	4		
40	125-100-200/5.5	100	11.5	5.5	1450	
41	125-100-200/7.5		14	7.5		
42	125-100-200/11		16.5	11		
43	125-100-250/15		25	15		
44	125-100-315/11		23	11		
45	125-100-315/18.5		32	18.5		
46	125-100-315/22		36	22		
47	125-100-315/30		40	30		
48	125-100-400/30		50	30		
49	125-100-400/37		58	37		
50	125-100-400/45		65	45	1480	
51	150-125-250/11	200	12.5	11		
52	150-125-250/15		16	15		
53	150-125-250/18.5		20	18.5		
54	150-125-250/22		24	22		
55	150-125-315/30		32	30		
56	150-125-315/37		39	37		
57	150-125-400/45		50	45		
58	150-125-400/55		57	55		

NISO, NIS, NISF Product range

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]	4-pole
59	150-125-400/75	400	200	68	75	
60	200-150-315/37		23	37		
61	200-150-315/45		27	45		
62	200-150-315/55		32	55		
63	200-150-315/75		38	75		
64	200-150-400/75		43	75		
65	200-150-400/90		50	90		
66	200-150-400/110		62	110		
67	250-200-315/37		20	37		
68	250-200-315/45		23	45		
69	250-200-315/55	630	24	55		
70	250-200-315/75		32	75		
71	250-200-400/90		37	90		
72	250-200-400/110		44	110		
73	250-200-400/132		53	132		
74	250-200-400/160		60	160		
75	300-250-315(Q)/75		26	75		
76	300-250-315(Q)/90		32	90		
77	300-250-315(Q)/110		35	110		
78	300-250-400(Q)/110		38	110		
79	300-250-400(Q)/132	800	45	132		
80	300-250-400(Q)/160		53	160		
81	300-250-400(Q)/200		63	200		
82	300-250-315/75		20	75		
83	300-250-315/90		25	90		
84	300-250-315/110		31	110		
85	300-250-400/132		37	132		
86	300-250-400/160		45	160		
87	300-250-400/200		50	200		
						1480



Performance curve

NISO,NIS,NISF 50-32-160/50-32-200

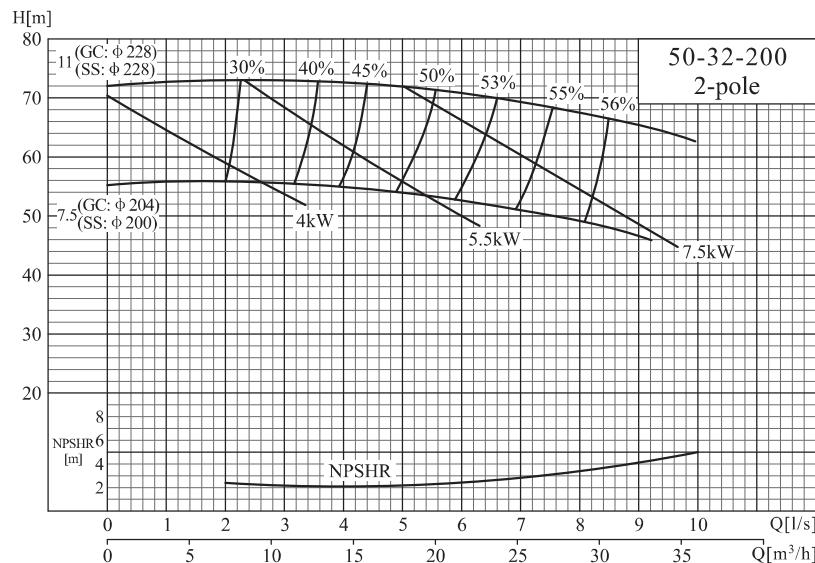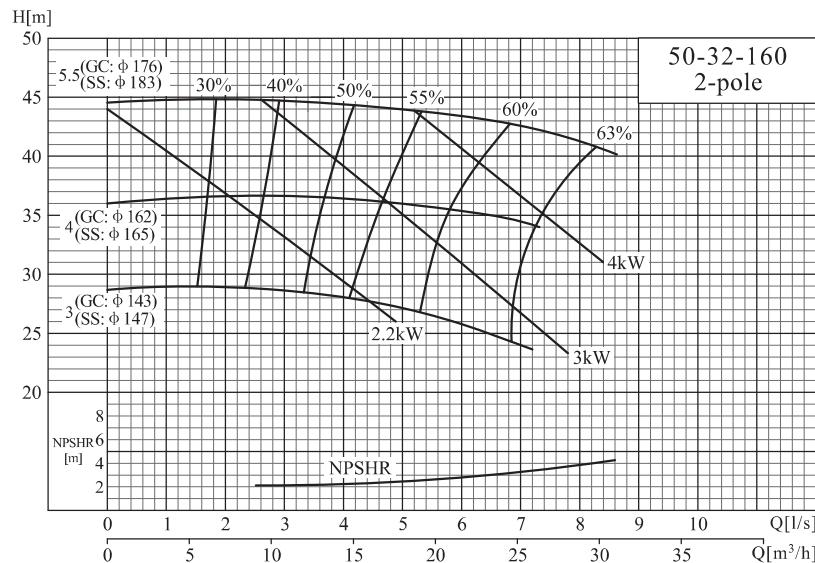



Performance curve

NISO,NIS,NISF 65-40-200/65-40-250

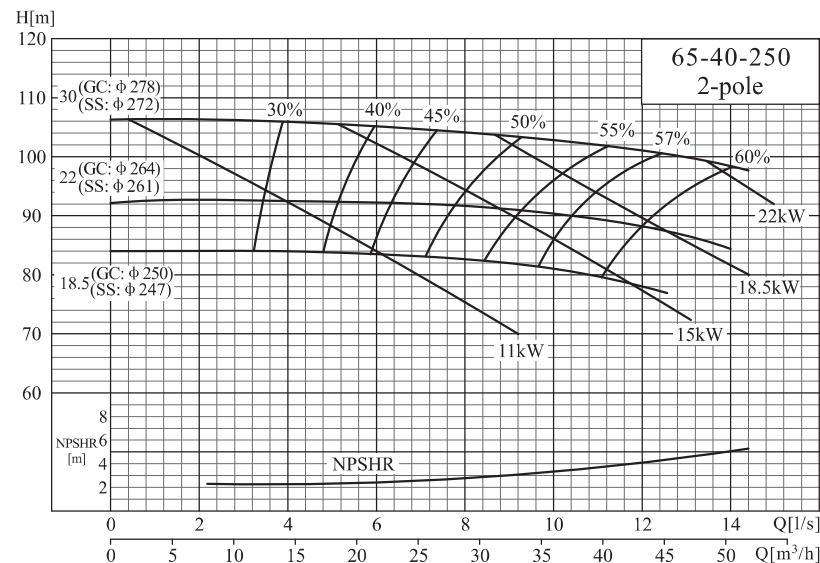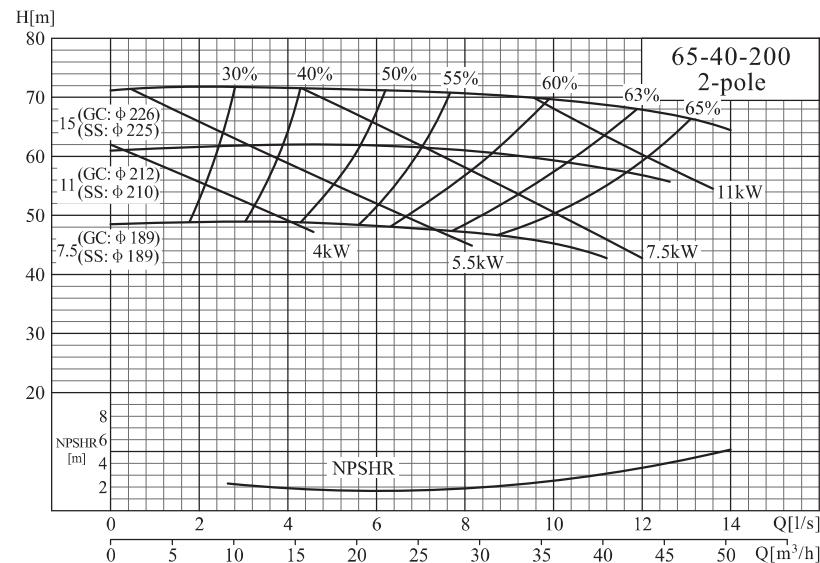



Performance curve

NISO,NIS,NISF 65-40-315/65-50-160

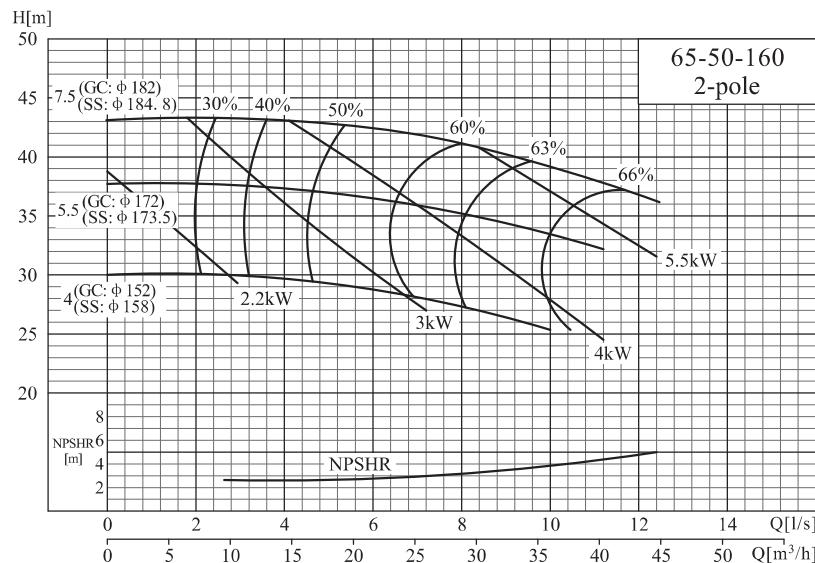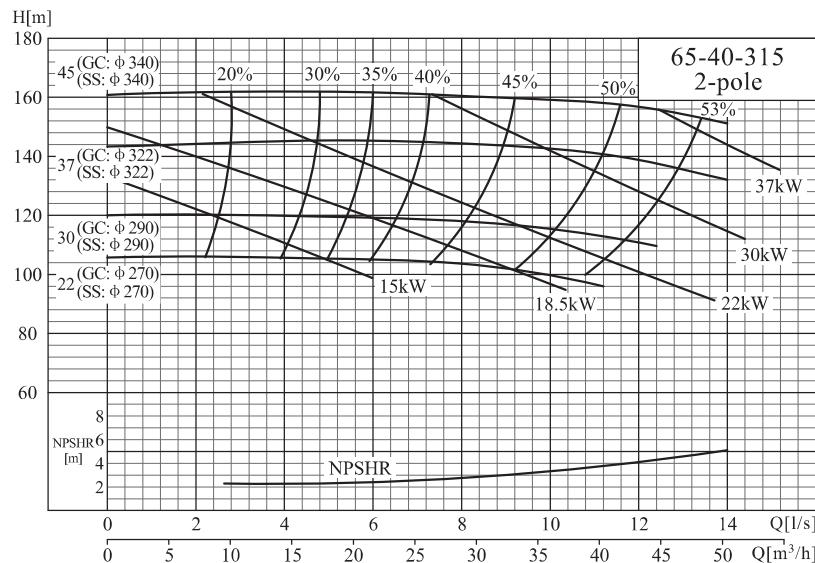



Performance curve

NISO,NIS,NISF 80-50-200/80-50-250

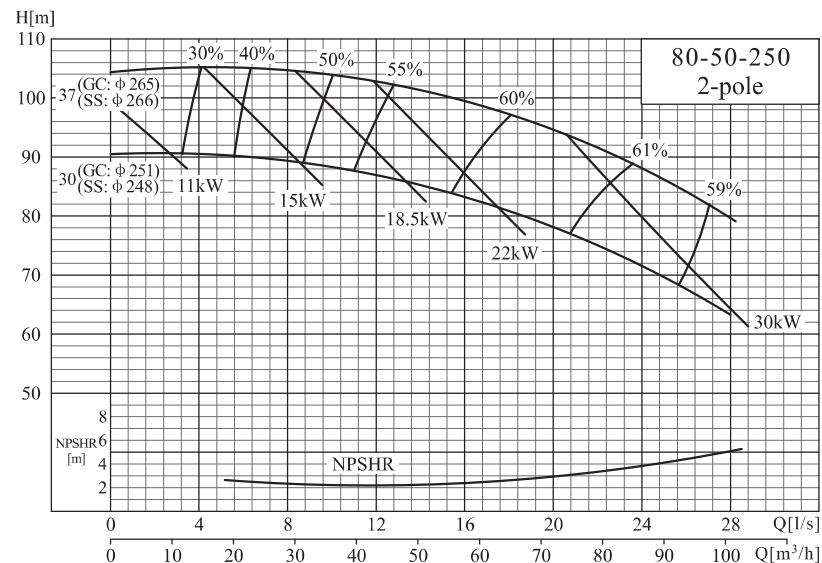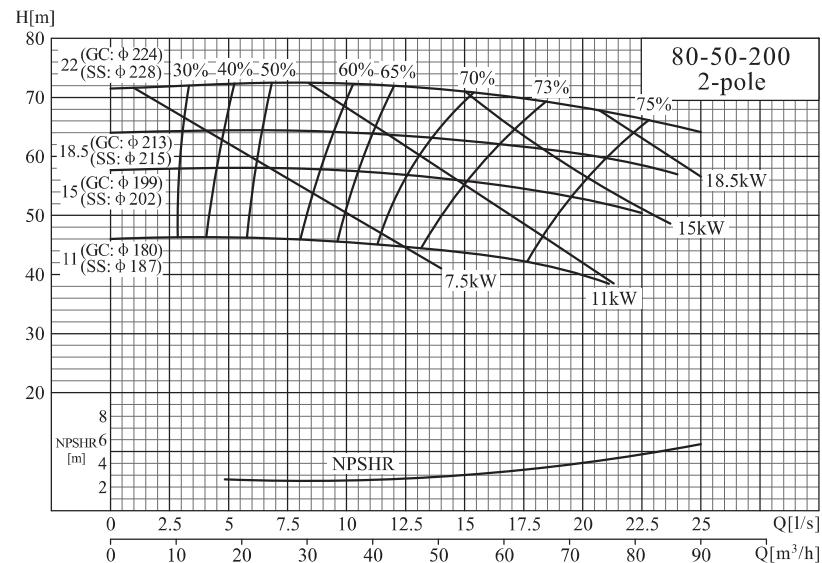



Performance curve

NISO,NIS,NISF 80-50-315/80-65-160

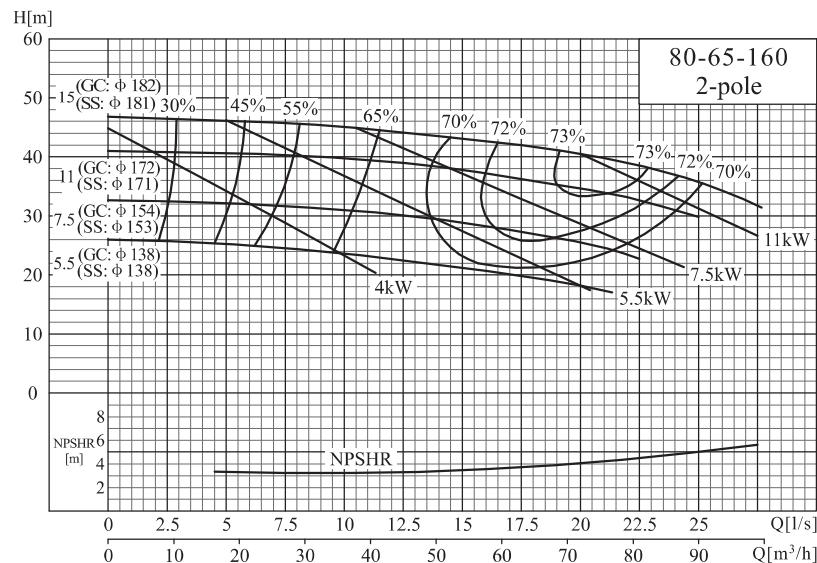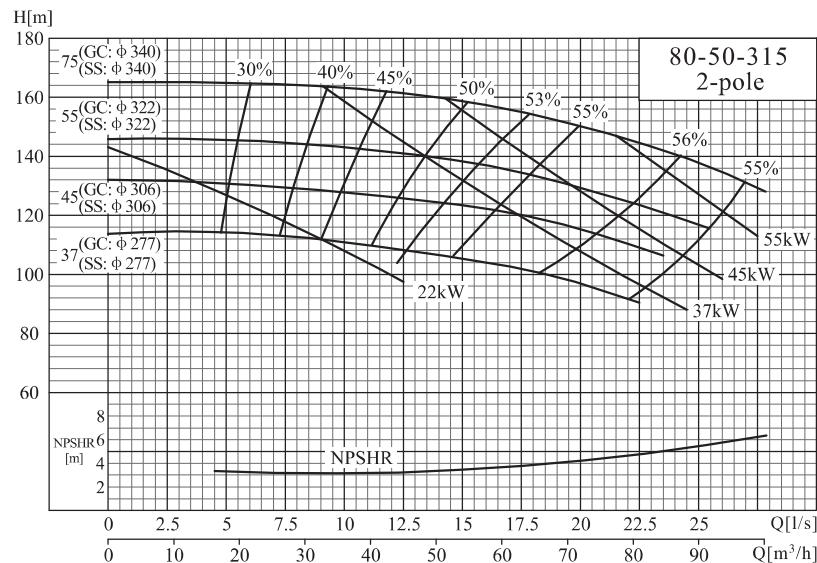



Performance curve

NISO,NIS,NISF 100-65-200/100-65-250

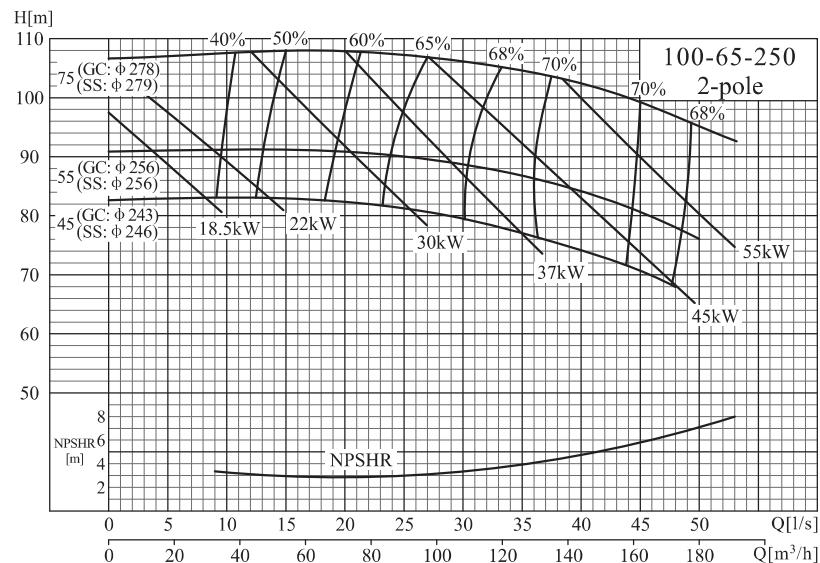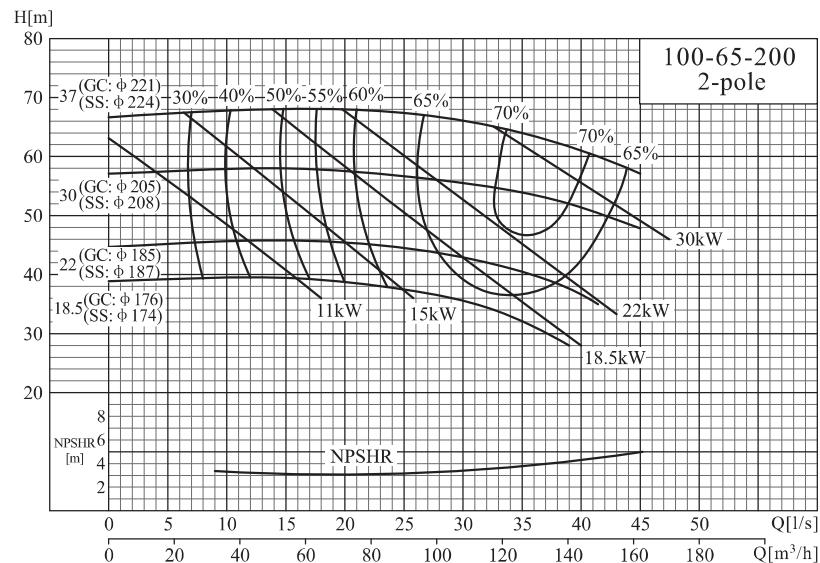



Performance curve

NISO,NIS,NISF100-65-315/100-80-160

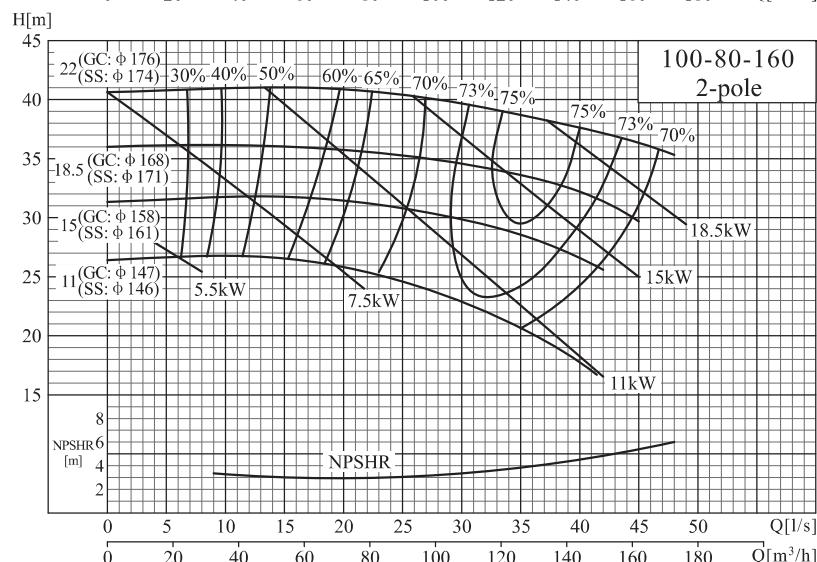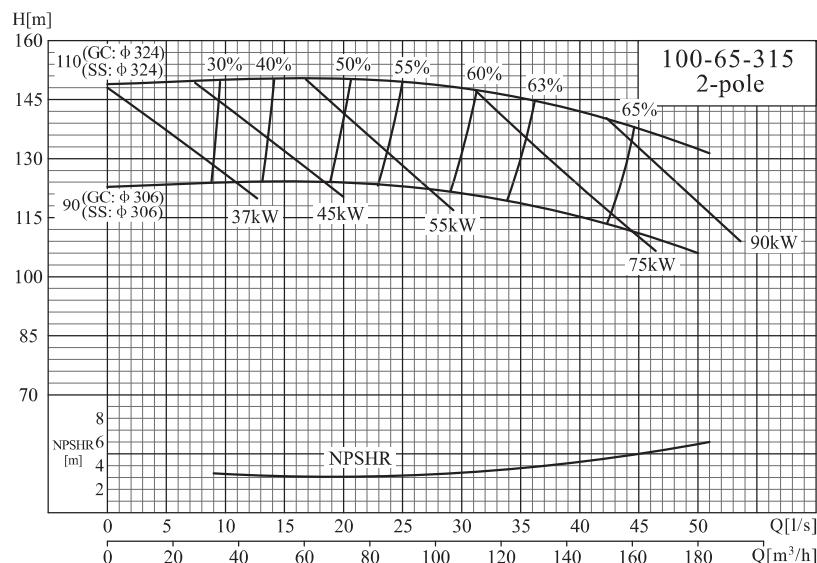



Performance curve

NISO,NIS,NISF125-100-200/125-100-250

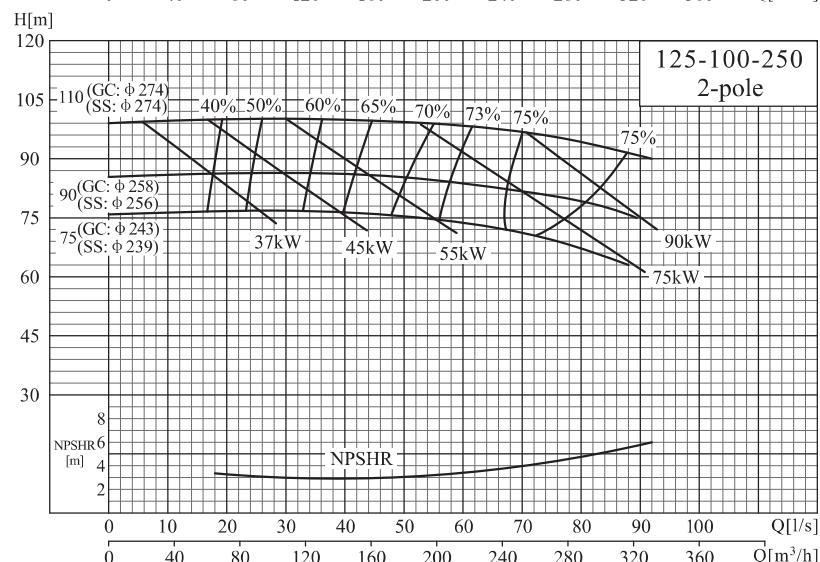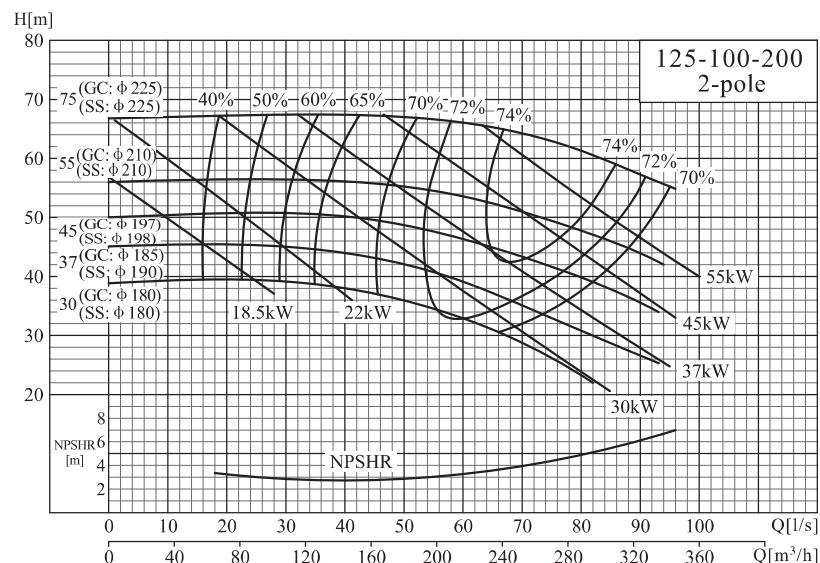



Performance curve

NISO,NIS,NISF 125-100-315/50-32-160

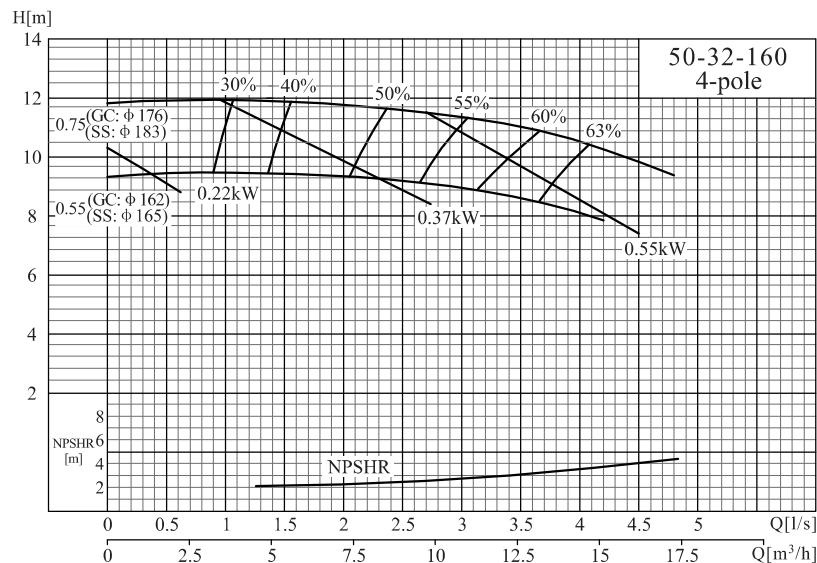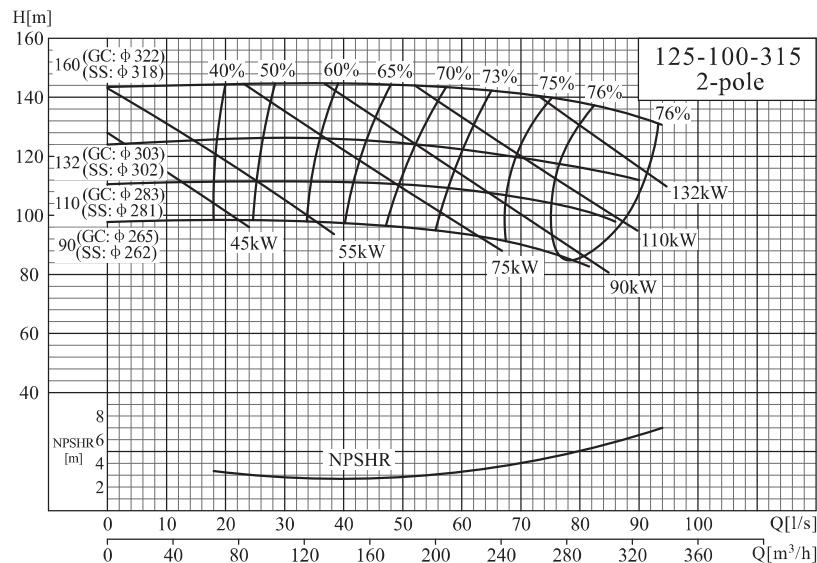



Performance curve

NISO,NIS,NISF 50-32-200/65-40-200

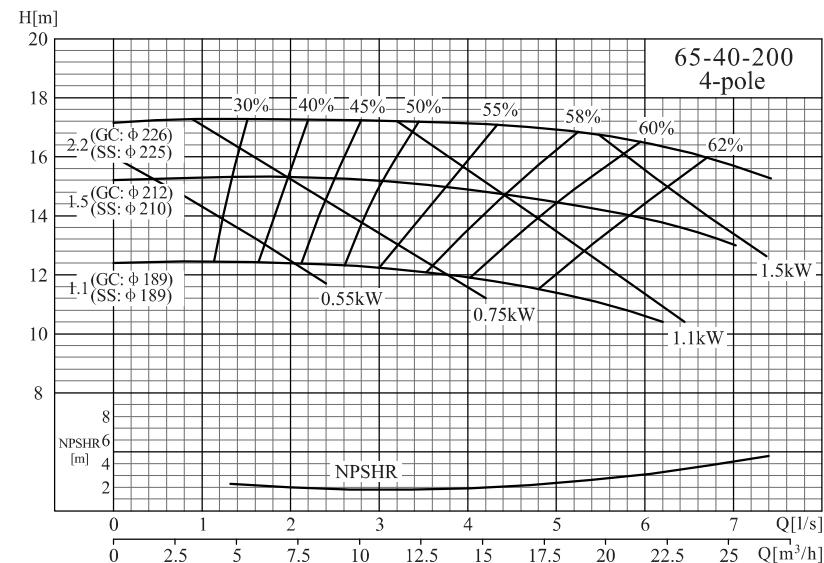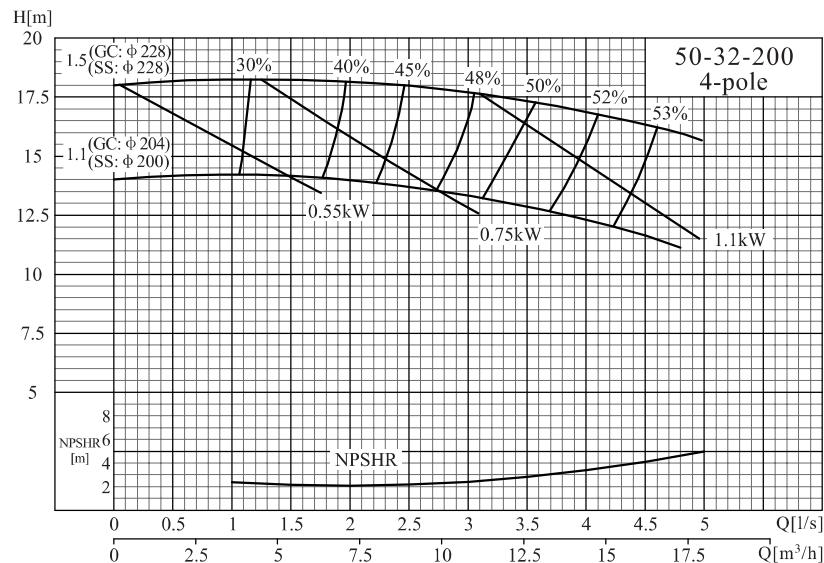



Performance curve

NISO,NIS,NISF 65-40-250/65-40-315

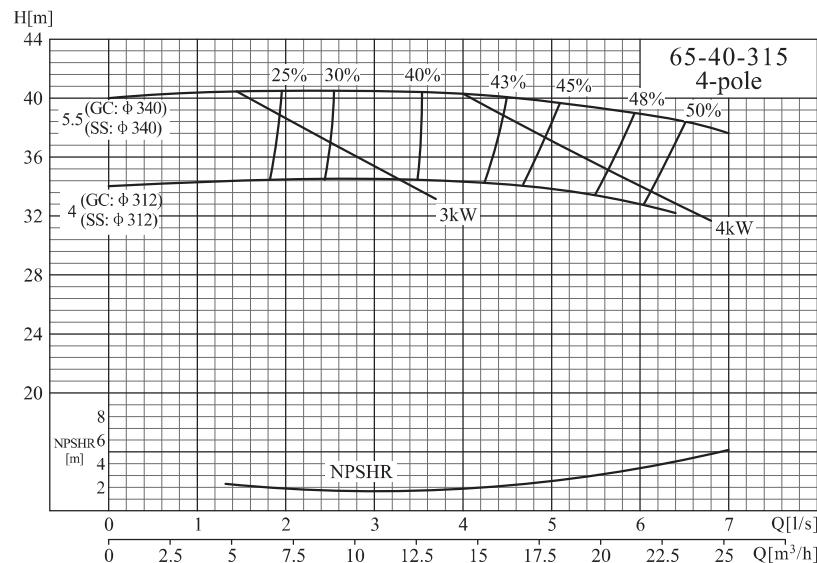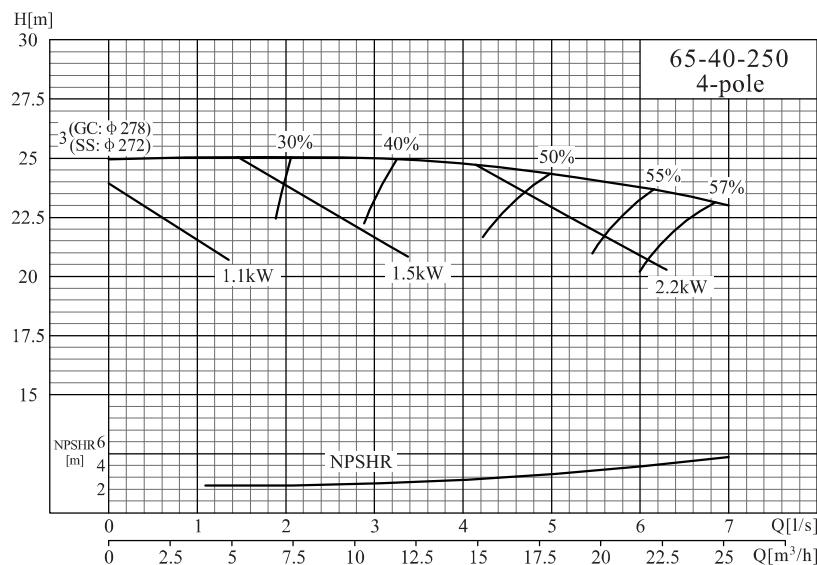



Performance curve

NISO,NIS,NISF 65-50-160/80-50-200

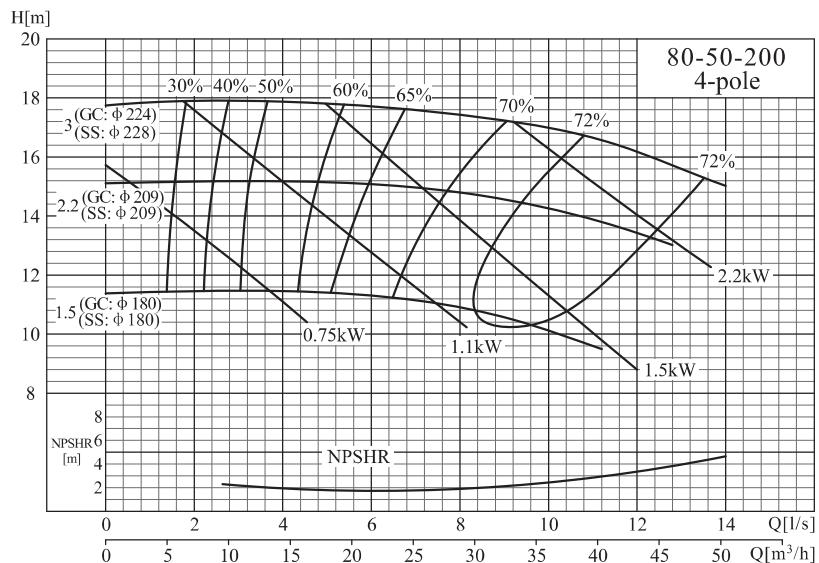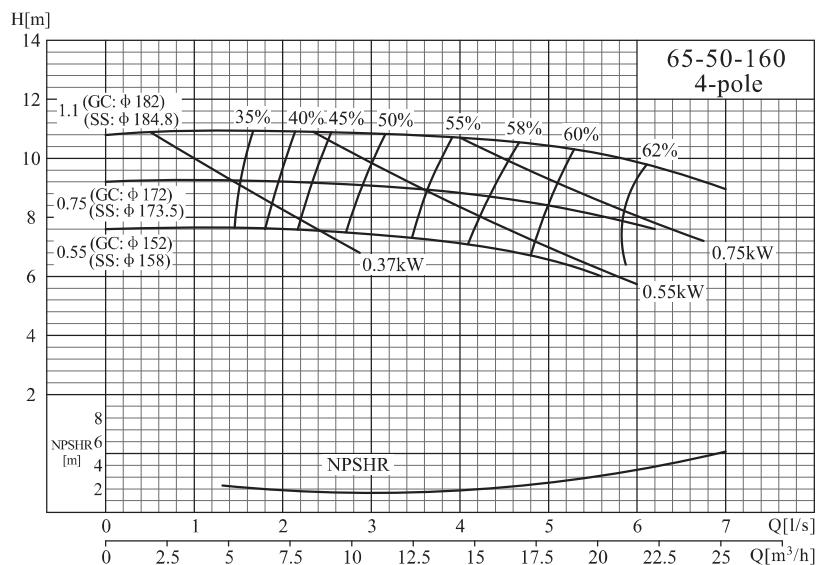



Performance curve

NISO,NIS,NISF80-50-250/80-50-315

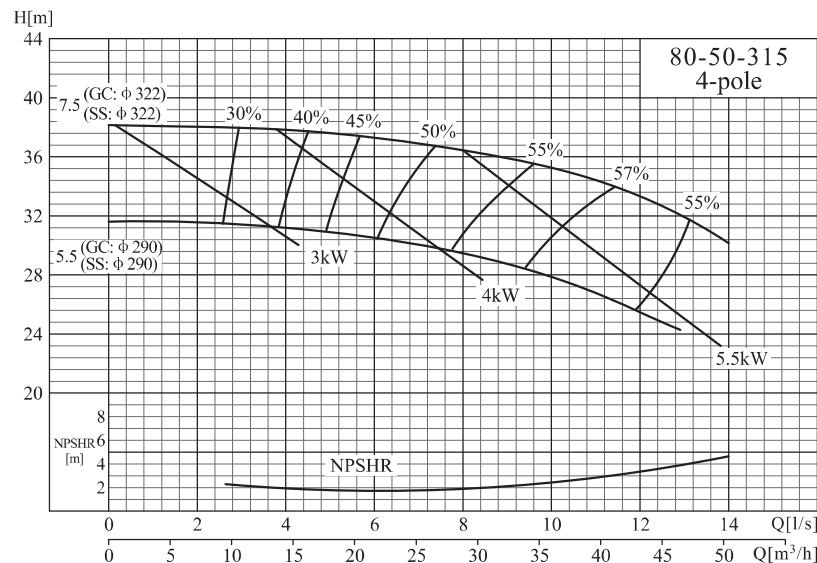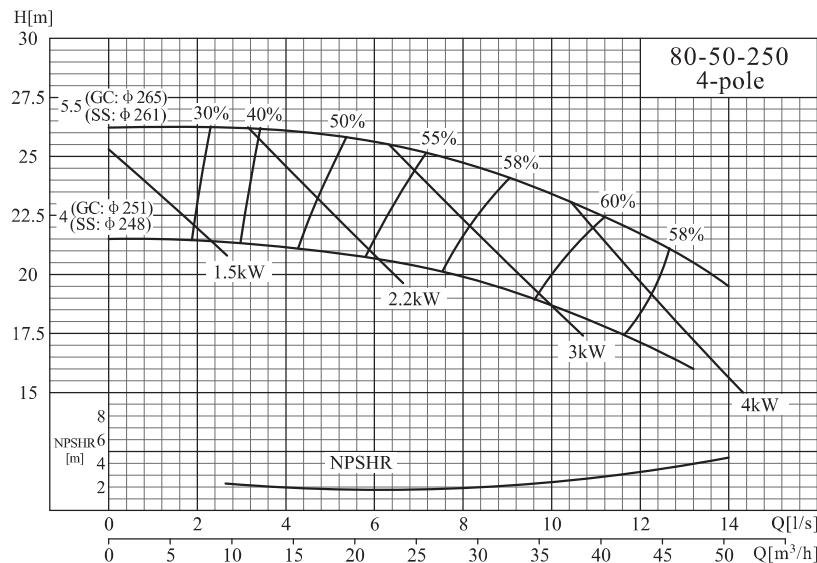



Performance curve

NISO,NIS,NISF80-65-160/100-65-200

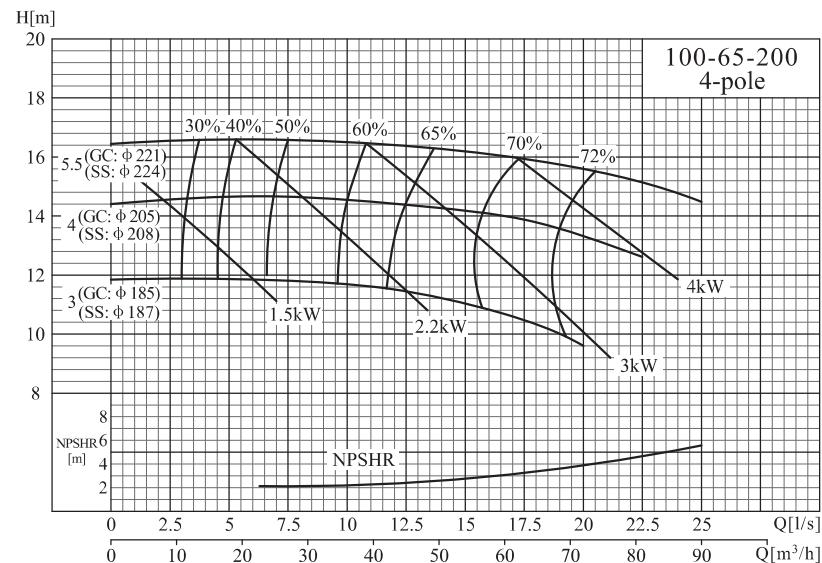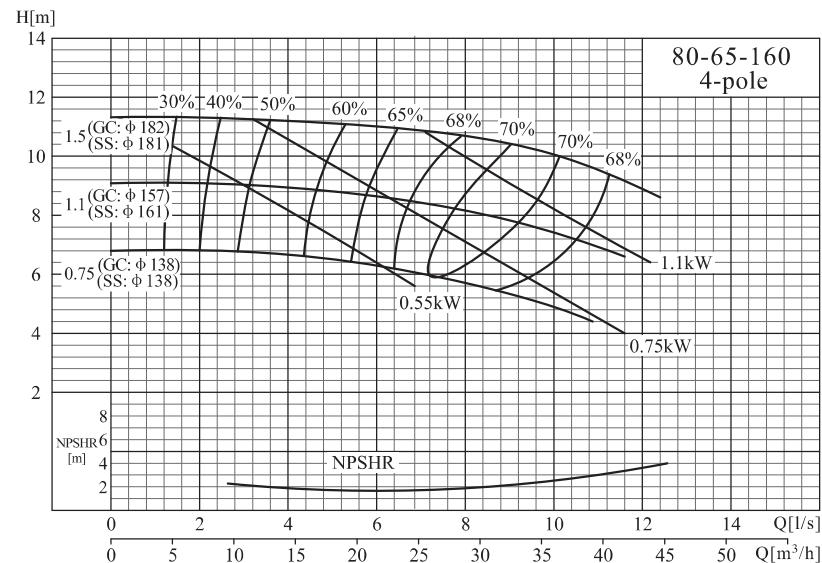



Performance curve

NISO,NIS,NISF 100-65-250/100-65-315

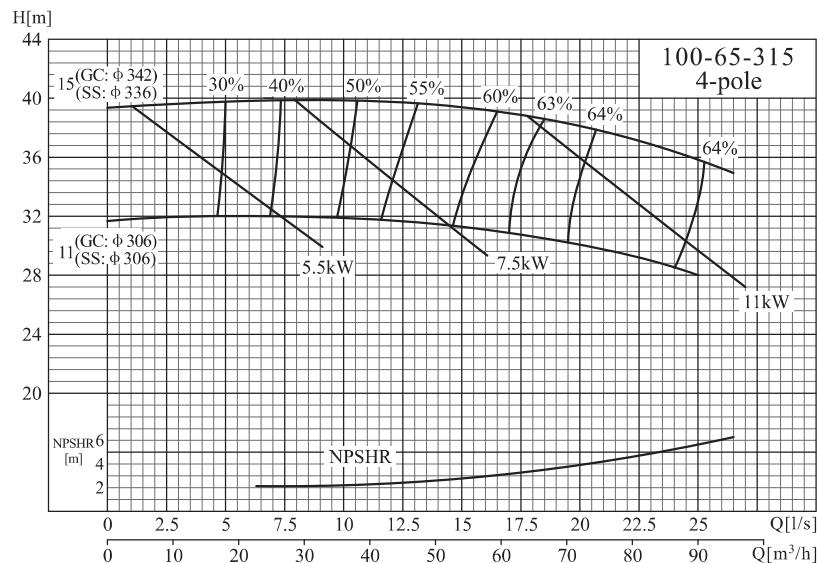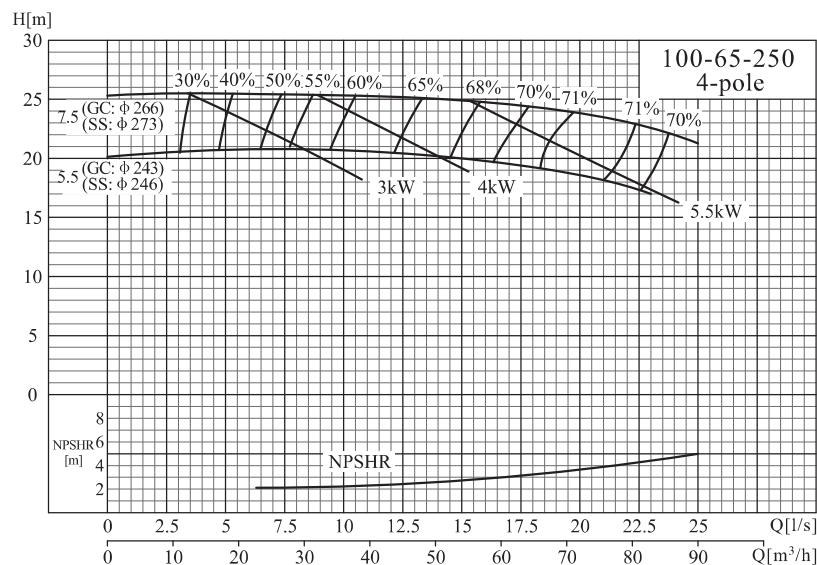



Performance curve

NISO,NIS,NISF 100-80-160/125-100-200

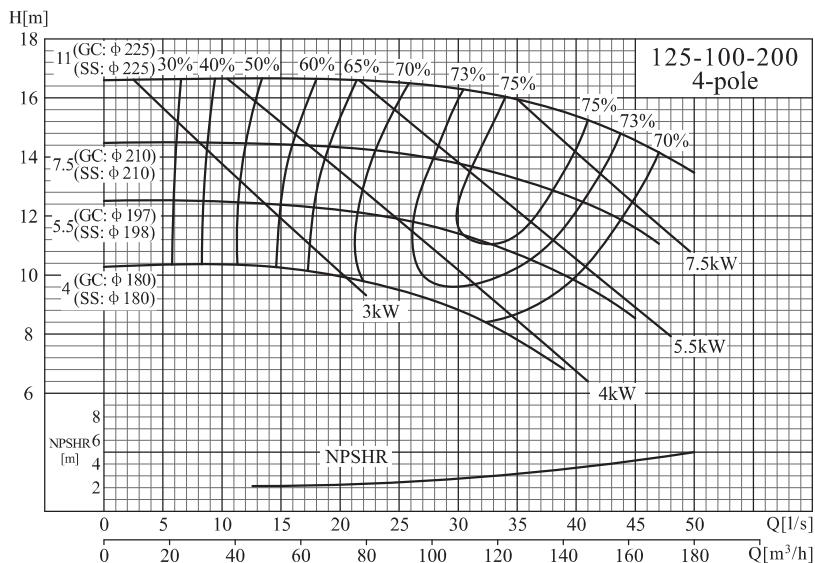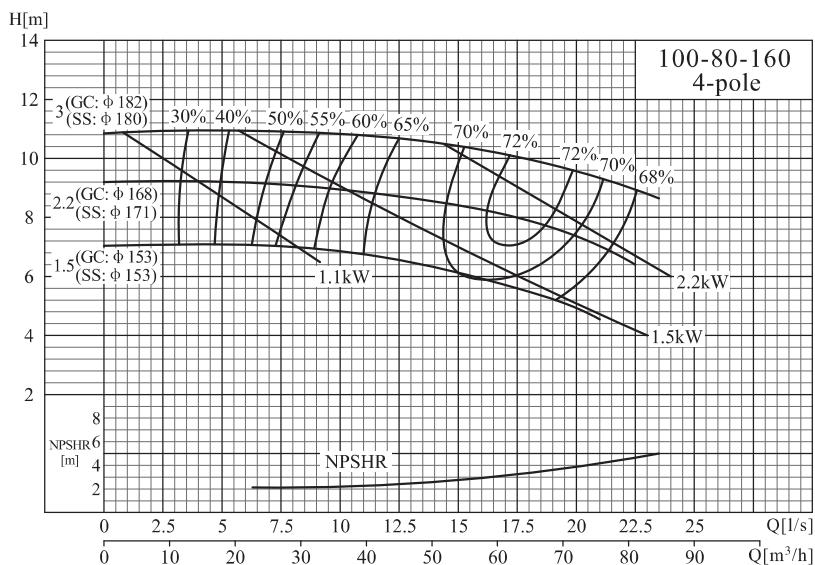



Performance curve

NISO,NIS,NISF 125-100-250/125-100-315

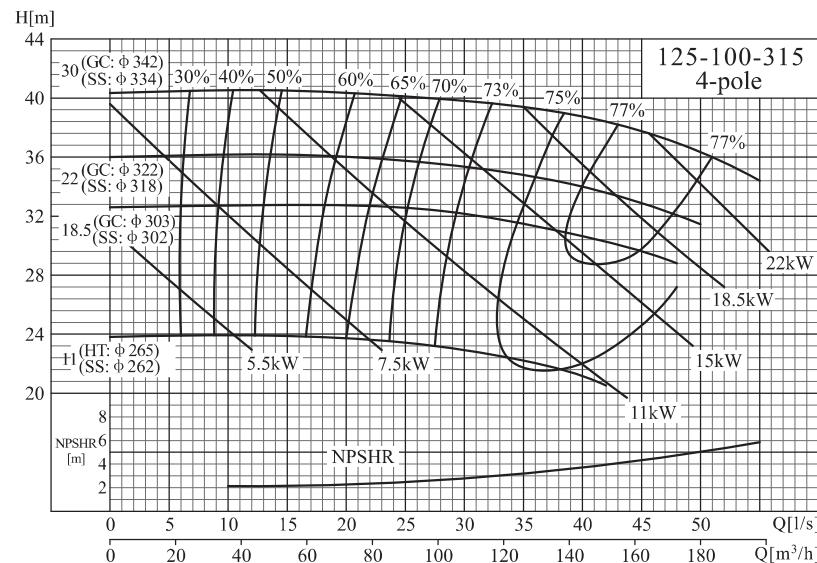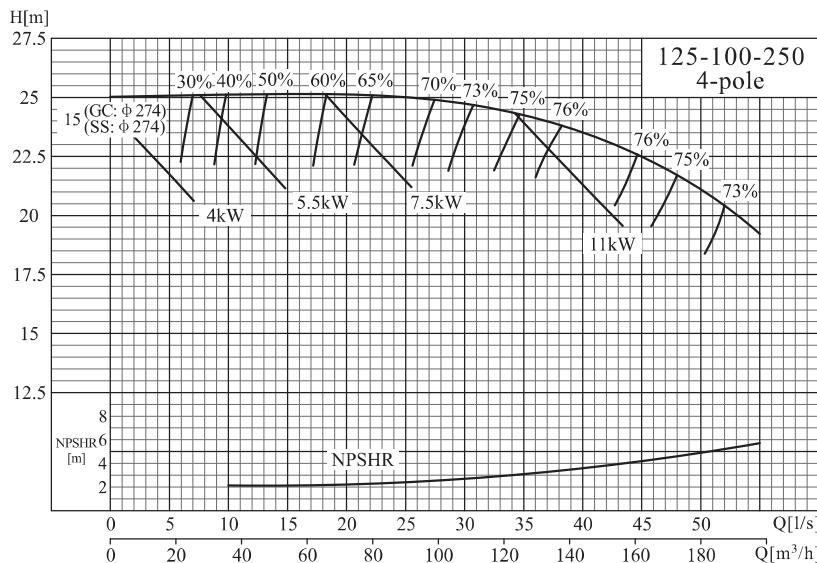



Performance curve

NISO,NIS,NISF 125-80-400/125-100-400

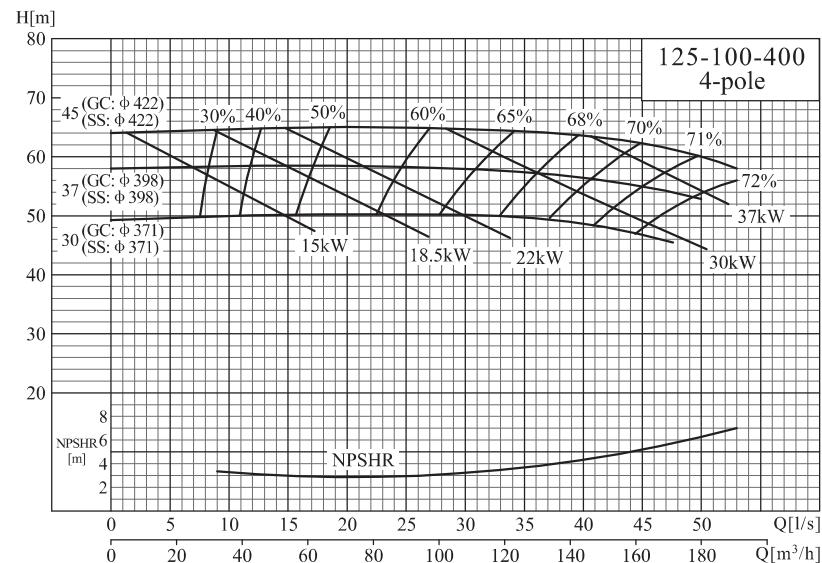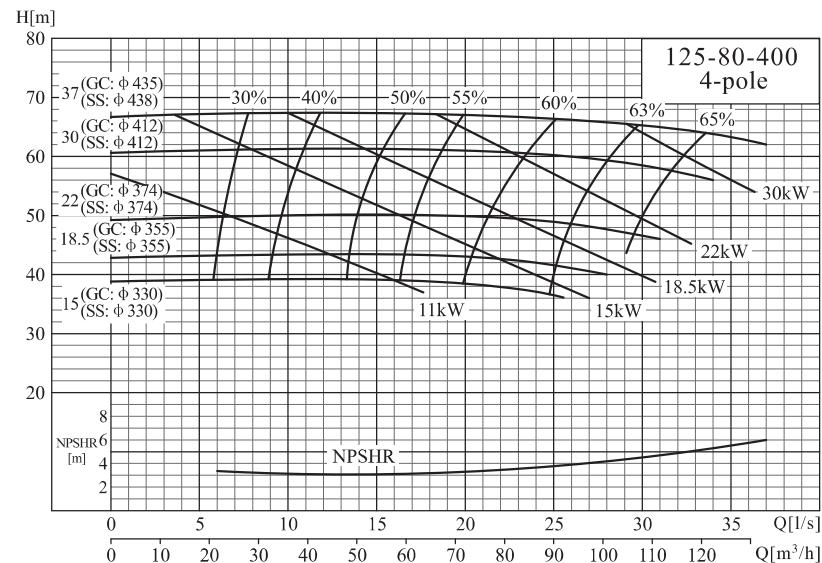



Performance curve

NISO,NIS,NISF 150-125-250/150-125-315

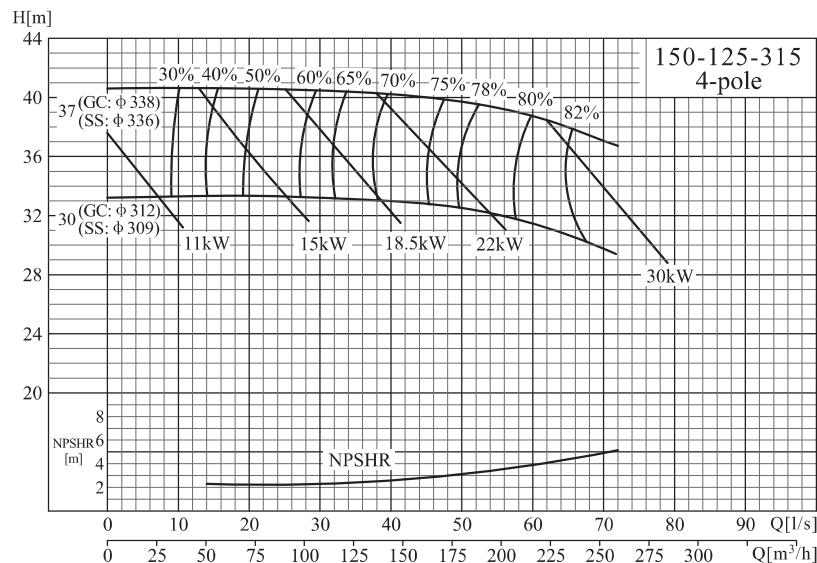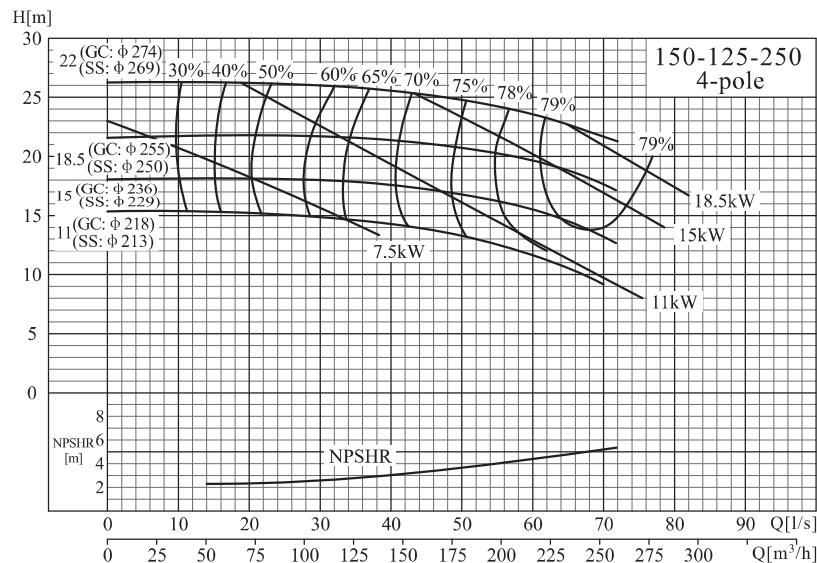


Performance curve

NISO,NIS,NISF 150-125-400/200-150-315

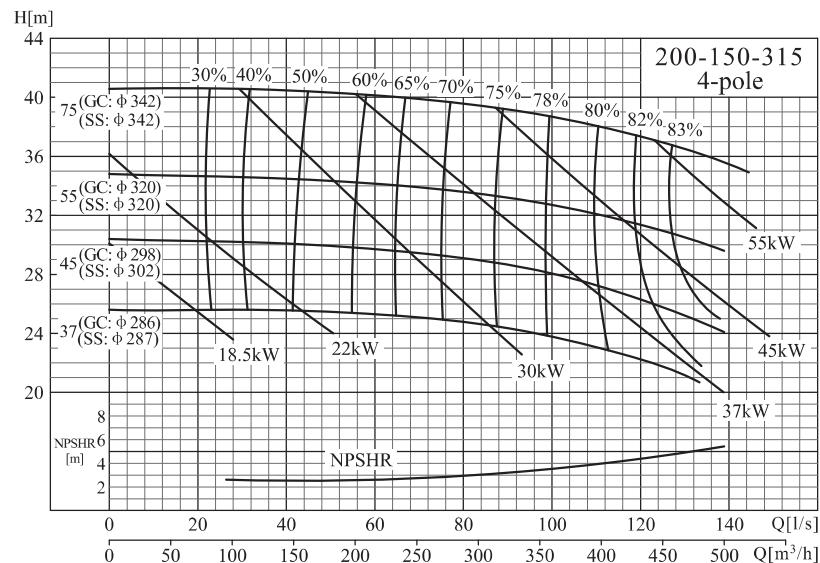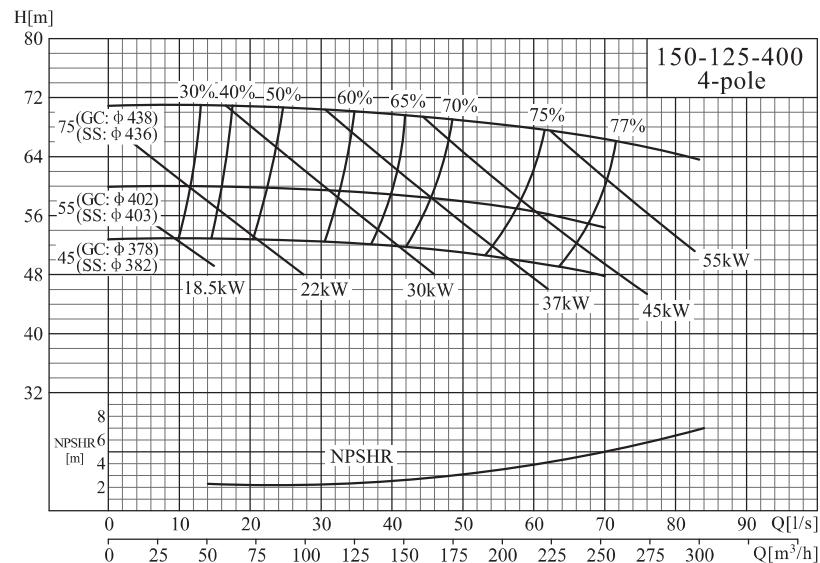


Performance curve

NISO,NIS,NISF200-150-400/250-200-315

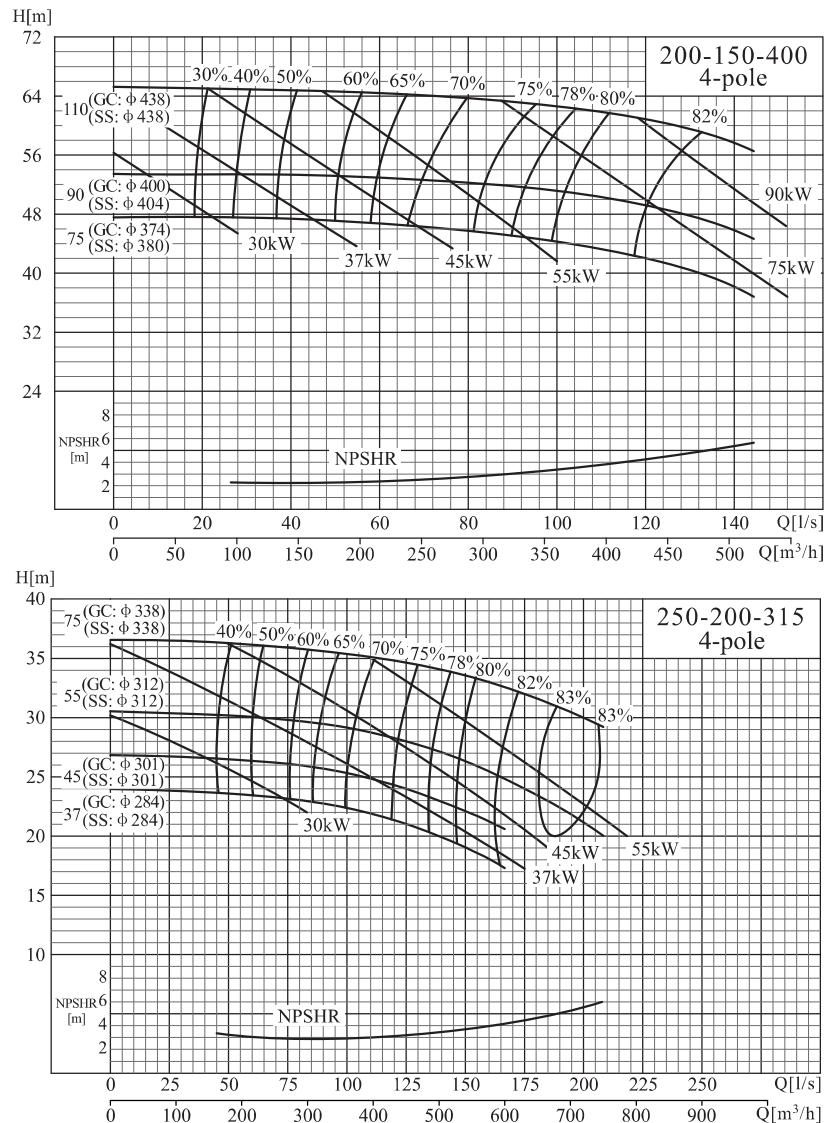



Performance curve

NISO,NIS,NISF250-200-400/300-250-315(Q)

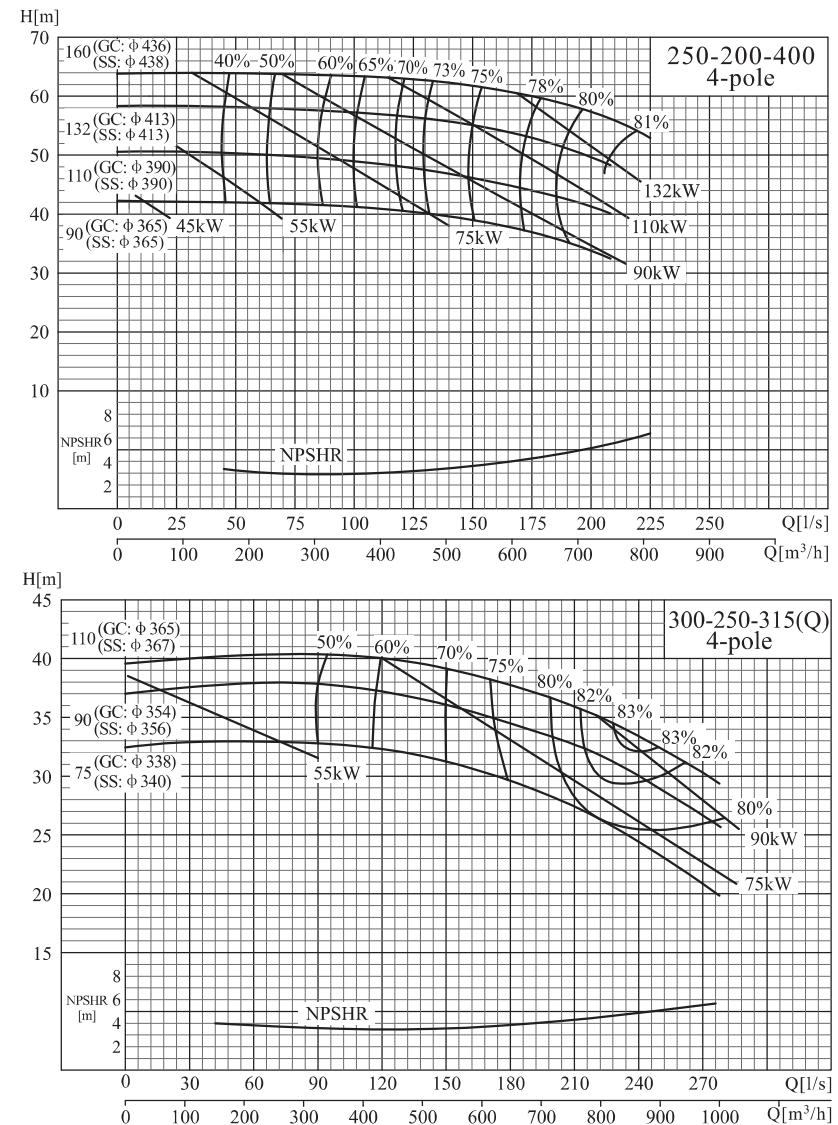


Performance curve

NISO,NIS,NISF300-250-400(Q)/300-250-315

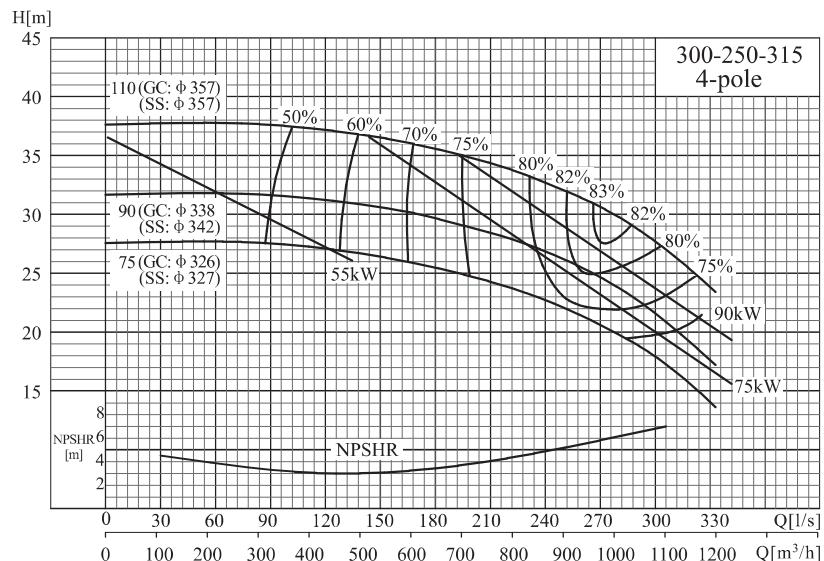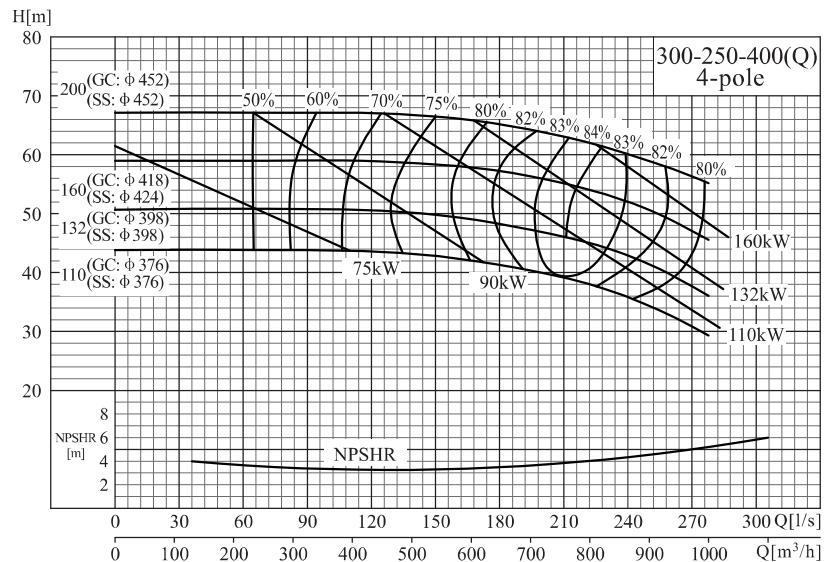


Performance curve

NISO,NIS,NISF300-250-400

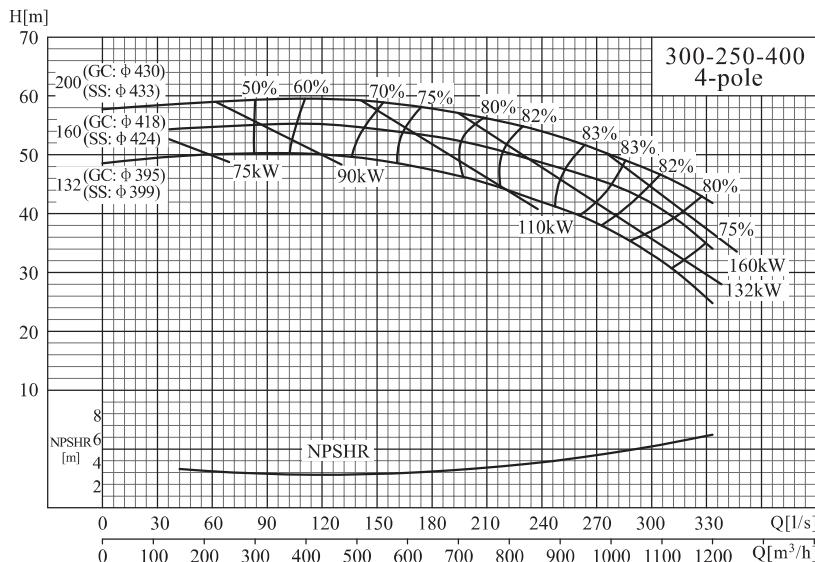

NISO dimension drawing

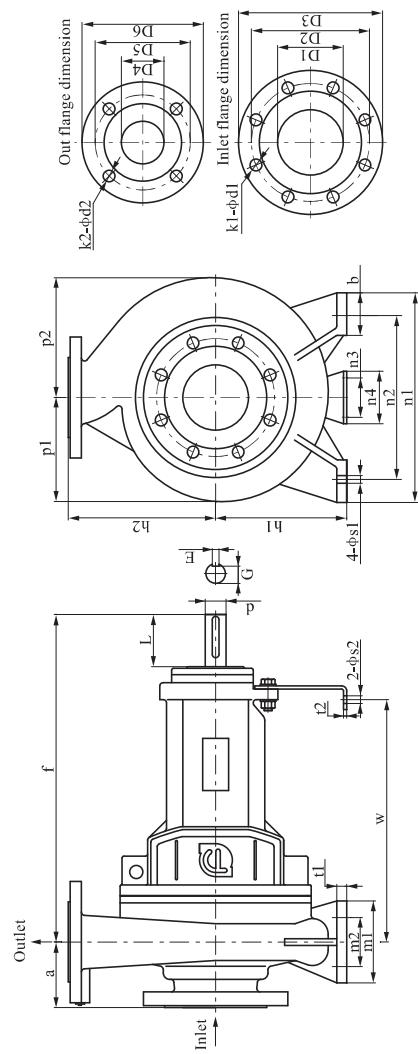


NISO dimension table

No.	Model	Dimension							Pump base plate and installation dimension										
		a	f	h1	h2	b	p1	p2	m1	m2	n1	n2	n3	n4	t1	t2	w	s1	s2
1	50-32-160	80	385	132	160	50	118	128	100	70	240	190	110	160	12	6	285	14	14
2	50-32-200	80	385	160	180	50	139	147	100	70	240	190	110	160	12	6	285	14	14
3	65-50-160	80	385	132	160	50	121	136	100	70	240	190	110	160	12	6	285	14	14
4	65-40-200	100	385	160	180	50	140	151	100	70	265	212	110	160	13	6	285	14	14
5	65-40-250	100	500	180	225	65	166	176	125	95	320	250	110	160	14	6	370	14	14
6	65-40-315	125	500	200	250	65	194	200	125	95	345	280	110	160	16	6	370	14	14
7	80-65-160	100	385	160	180	50	124	143	100	70	265	212	110	160	13	6	285	14	14
8	80-50-200	100	385	160	200	52	147	161	100	70	265	212	110	160	13	6	285	14	14
9	80-50-250	125	500	180	225	65	167	179	125	95	320	250	110	160	15	6	370	14	14
10	80-50-315	125	500	225	280	65	204	215	125	95	345	280	110	160	18	6	370	14	14
11	100-65-200	100	500	180	225	65	159	183	125	95	320	250	110	160	14	6	370	14	14
12	100-65-250	125	500	200	250	80	180	201	160	120	360	280	110	160	16	6	370	18	14
13	100-65-315	125	530	225	280	80	210	228	160	120	400	315	110	160	18	6	370	18	14
14	100-80-160	100	500	160	200	65	132	160	125	95	280	212	110	160	14	6	370	14	14
15	125-80-400	125	530	280	355	80	261	279	160	120	435	355	110	160	20	6	370	18	14
16	125-100-200	125	500	200	280	80	175	210	160	120	360	280	110	160	17	6	370	18	14
17	125-100-250	140	530	225	280	80	193	225	160	120	400	315	110	160	18	6	370	18	14
18	125-100-315	140	530	250	315	80	224	250	160	120	400	315	110	160	19	6	370	18	14
19	125-100-400	140	530	280	355	100	265	287	200	150	500	400	110	160	20	6	370	18	14
20	150-125-250	140	530	250	355	80	204	244	160	120	400	315	110	160	19	6	370	18	14
21	150-125-315	140	530	280	355	100	236	271	200	150	500	400	110	160	20	6	370	22	14
22	150-125-400	140	530	315	400	100	273	301	200	150	500	400	110	160	21	6	370	22	14
23	200-150-315	160	670	315	400	82	255	304	200	150	515	450	140	180	25	10	500	22	18
24	200-150-400	160	670	315	450	82	291	330	200	150	515	450	140	180	25	10	500	22	18
25	250-200-315	180	670	315	450	82	278	344	200	150	515	450	140	180	25	10	500	22	18
26	250-200-400	180	670	380	450	82	314	367	200	150	515	450	140	180	25	10	500	22	18
27	300-250-315(Q)	225	698	375	455	120	303	381	300	250	710	600	140	180	25	10	528	28	18
28	300-250-400(Q)	225	676	425	500	120	328	395	300	250	710	600	140	180	25	12	506	28	18
29	300-250-315	225	698	375	455	120	303	381	300	250	710	600	140	180	25	10	528	28	18
30	300-250-400	225	676	425	500	120	328	395	300	250	710	600	140	180	25	12	506	28	18

NISO pump set dimension table

Model	Power (kW)	4-pole													
		H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
300-250-400	132	1045	545	800	1330	850	1880	275	22	125	2236	225	300	250	2085
	160	1045	545	800	1330	850	1880	275	22	125	2236	225	300	250	2145
	200	1045	545	800	1330	850	1880	275	22	125	2236	225	300	250	2260

NIS, NISF pump dimension drawing

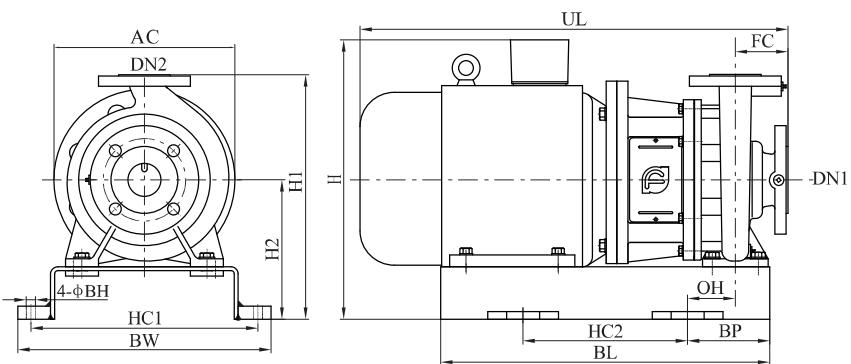

NIS, NISF pump dimension table

Model	Power (kW)	2-pole														
		H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
50-32-160	3	382	372	212	306	250	336	450	100	14	47.5	563	80	50	32	75
	4	400	372	212	306	250	336	450	100	14	47.5	578	80	50	32	81
	5.5	425	372	212	335	300	365	500	100	14	47.5	650	80	50	32	105
50-32-200	7.5	453	420	240	350	300	380	500	100	14	46	650	80	50	32	120
	11	500	420	240	390	350	420	600	125	18	71	787	80	50	32	175
65-40-200	7.5	453	420	240	335	300	365	500	100	14	47.5	670	100	65	40	120
	11	500	420	240	390	350	420	600	125	18	71	807	100	65	40	177
	15	500	420	240	390	350	420	600	125	18	71	807	100	65	40	187
65-40-250	18.5	520	485	260	390	400	420	660	130	18	63.5	865	100	65	40	222
	22	535	485	260	430	400	460	700	150	18	81.5	895	100	65	40	257
	30	585	505	280	470	450	500	750	150	18	81.5	967	100	65	40	318
65-40-315	22	555	530	280	430	400	460	700	150	18	81.5	920	125	65	40	270
	30	585	530	280	465	500	495	800	150	18	81.5	992	125	65	40	340
	37	585	530	280	465	500	495	800	150	18	81.5	992	125	65	40	359
	45	640	555	305	520	500	560	820	160	22	90	1042	125	65	40	428
65-50-160	4	400	372	212	306	250	336	450	100	14	47.5	578	80	65	50	83
	5.5	425	372	212	335	300	365	500	100	14	47.5	650	80	65	50	107
	7.5	425	372	212	335	300	365	500	100	14	47.5	650	80	65	50	110

